

2024

NELUX ARCHITECTURAL LIGHTING


**PRODUCTS
FOR LIGHTING PROJECTS**



PRODUCTS

MUST HAVE

{ MH } Series

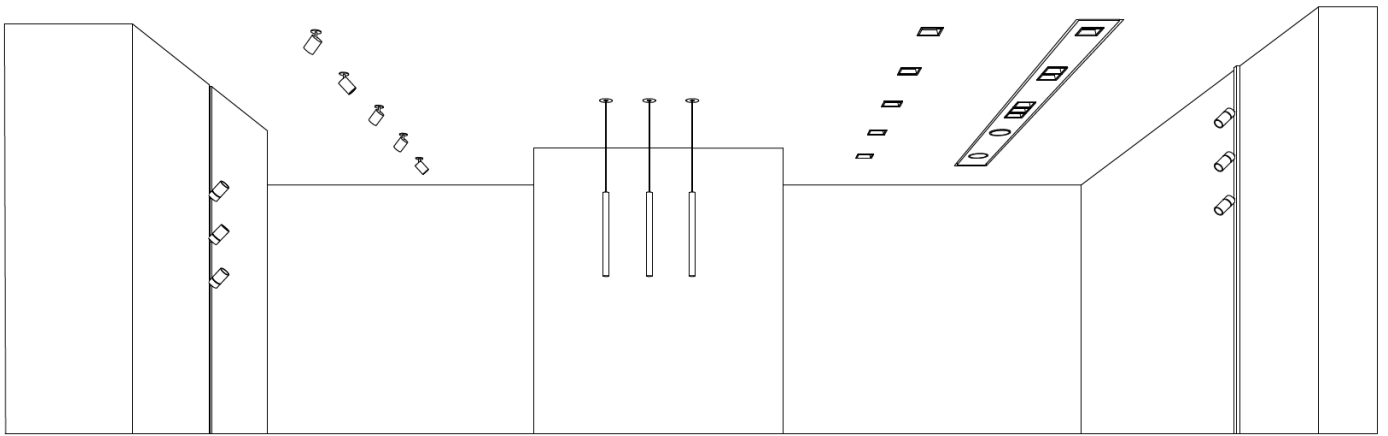

- 48V Track Mounted
- Ceiling Mounted
- Suspension lamps
- Recessed Downlight
- Surface Luminaires
- Hotel Downlights
- Anti-glare luminaires
- Track Mounted

More information about our architectural lighting products, please visit our website www.nelux.com.hk

Catalogs- Click on Image

Contact us- Click on Image



BASICOS PARA UN PROYECTO COMPETITIVO

precios

DOIT AVOIR POUR UN PROJET COMPÉTITIF

de prix

MUST HAVE FOR A COMPETITIVE PROJECT

See prices

MUST HAVE PER UN PROGETTO COMPETITIVO

Vedi listino

FUNDAMENTOS PARA UM PROJETO COMPETITIVO

Ver preços

Los precios establecidos en el listado son precios Ex-Works HK. Si desea DAP (puerta a puerta), le daremos una cotización.

El pedido se debe efectuar por cajas master completas, establecida en la ficha del producto

La cantidad mínima de la orden por referencia es de 100 uds o 200ud y se ajusta según las uds de la caja Master.

Cantidades superiores a 1000uds pónganse en contacto con nosotros.

La forma de pago establecida en la primera orden es de 50% a la orden y 50% una vez finalizado el pedido. Otras formas de pago establecidas son mediante acuerdos o contratos comerciales establecidos con nuestros clientes.

Les prix indiqués dans la liste sont les prix Ex-Works HK. Si vous souhaitez du DAP (porte à porte), nous vous ferons un devis.

La commande doit être faite par cartons maîtres complets, établis dans la fiche produit

La quantité minimale de commande par référence est de 100 unités ou 200 unités et est ajustée en fonction des unités du coffret Master.

Quantités supérieures à 1000 unités, veuillez nous contacter.

Le mode de paiement établi lors de la première commande est de 50% à la commande et de 50% une fois la commande terminée. Les autres modes de paiement établis se font par le biais d'accords commerciaux ou de contrats établis avec nos clients.

Prices stated in the price list are Ex-Works HK prices. If you want DAP (door to door), we will give you a quotation.

The order must be made by complete master boxes, established in the product file

The minimum order quantity per reference is 100 units or 200 units and it must be adjusted according to the units of the Master box.

Quantities greater than 1000 units, please contact us.

The form of payment established in the first order is 50% to the order and 50% once the order is finished. Other forms of payment established are through commercial agreements or contracts established with our clients.

I prezzi indicati nell'elenco sono prezzi franco fabbrica HK. Se vuoi DAP (porta a porta), ti faremo un preventivo.

L'ordine deve essere effettuato tramite master box completi, stabiliti nella scheda prodotto

La quantità minima d'ordine per riferimento è di 100 unità o 200 unità e viene regolata in base alle unità della casella Master.

Quantità superiori a 1000 unità, contattateci.

La forma di pagamento stabilita nel primo ordine è del 50% sull'ordine e del 50% una volta terminato l'ordine. Altre forme di pagamento stabilite sono attraverso accordi commerciali o contratti stipulati con i nostri clienti.

Os preços indicados na listagem são preços Ex-Works HK. Se você quiser DAP (porta a porta), nós lhe daremos uma cotação.

O pedido deve ser feito por caixas master completas, estabelecidas no arquivo do produto

A quantidade mínima de pedido por referência é de 100 unidades o 200 unidades e é ajustada de acordo com as unidades da caixa Master.

Quantidades superiores a 1000 unidades, consulte-nos.

A forma de pagamento estabelecida no primeiro pedido é de 50% no pedido e 50% no final do pedido. Outras formas de pagamento estabelecidas são através de acordos comerciais ou contratos estabelecidos com nossos clientes.

Precios vigentes hasta el 31.01.2023

Tarifs valables jusqu'au 31.01.2023

Prices valid until 31.01.2023

Prezzi validi fino al 31.01.2023

Preços válidos até 31.01.2023

nelux se reserva el derecho a modificar las características técnicas de nuestros productos así como el embalaje al objeto de mejorar nuestra calidad y servicio.

nelux se réserve le droit de modifier les caractéristiques techniques de nos produits ainsi que les emballages afin d'améliorer notre qualité et notre service.

A nelux reserva-se o direito de modificar as características técnicas dos nossos produtos, bem como a embalagem, de forma a melhorar a nossa qualidade e serviço.

nelux si riserva il diritto di modificare le caratteristiche tecniche dei nostri prodotti così come l'imballaggio al fine di migliorare la nostra qualità e servizio.






PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



SERIES {MH} Must Have

 Haga click en la imagen  Cliquez sur l'image  Click on the image  Clique na imagem  Clicca sull'immagine

TRACK SPOT LIGHT

FRU

RIN DOTS

HOFF

FRU I

FRU II

FRU III

RIN DOTS I

RIN DOTS II

HOFF I

HOFF II ZOOM

HOFF III

RIN ROUND

MUSE TRACK

RIN ROUND I

RIN ROUND II

MAX-H

DOWNLIGHT

TEGAL

TEGAL I

TEGAL II

TEGAL III

TEGAL IV

TEGAL V

TEGAL VI

TEGAL VII

TEGAL VIII

BIG DOWNLIGHT

DUKE

POU

DUKE

POU

IP65 DOWN LIGHT

TEGAL OUT

TEGALOUT I IP65

TEGALOUT II IP65

MINI DOWNLIGHT Series UGR<=19






TITANI

TITANI I

TITANI II



SERIES {MH} Must Have

 Haga click en la imagen  Cliquez sur l'image  Click on the image  Clique na imagem  Clicca sull'immagine

TECHNICAL DOWNLIGHT

DIAMOND

LUCEN

DIAMOND FIX

DIAMOND ADJ

LUCEN ADJ

LUCEN TRIMLESS

LUMEN TRIM

LUCEN MC

MULTI LED

INLINE

INLINE I FIX

INLINE I ADJUST

INLINE I TRIMLESS

TUTTO MAGNETIC TRACK DC48V

TUTTO MAGNETIC

STANDARD TRACK

PENDANT LAMP

TUTTO AC220-240V • AC110-127V

TUTTO TRACK MAIN VOLTAGE

MAIN VOLTAGE

ZOOMABLE

ASYMMETRIC

PENDANT LAMP

TUTTO MAIN VOLTAGE RECESSED,SURFACE & PENDANT

RECESSED SPOT

SURFACE SPOT

RECESSED DOWNL

RECESSED PENDANT

SURFACE PENDANT

SURFACE

SURFACE MOUNTED

TAFILO

WALL & CEILING

SUSPENDED LAMP

ROD LAMP




FRU I - TRACK SPOT LIGHT [28W, 35W] LENS


Applications



IP	CRI
20	90




FR85100.28 28W
Luminus Led
28W CRI80~2975lm
355° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 20°, 26°, 36°, 60°
CRI>80, CRI>90
Power gear track adapter driver
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL34C80
PN38C70

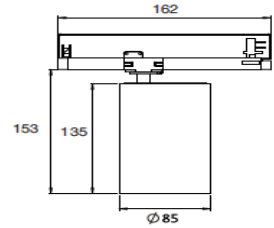

FR85135.35 35W
Luminus Led
40W CRI80~3380lm
355° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 20°, 26°, 36°, 60°
CRI>80, CRI>90
Power gear track adapter driver
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL44C70
PN49C75



• Two models

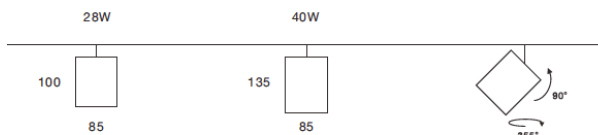

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 50 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
PHOTOMETRIC CURVES CONTACT US Nelux provide you shortly


www.nelux.com.hk

FRU II - TRACK SPOT LIGHT [28W, 35W] REFLECTOR


Applications




UGR	CRI
<19	90



FR85100R.28 28W
Luminus Led
28W CRI80~2825lm
355° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 20°, 24°, 36°, 60°
CRI>80, CRI>90
Power gear track adapter driver
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL33C90
PN37C75

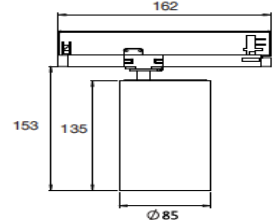


FR85135R.35 35W
Luminus Led
40W CRI80~3380lm
355° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 20°, 26°, 36°, 60°
CRI>80, CRI>90
Power gear track adapter driver
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL44C70
PN49C80

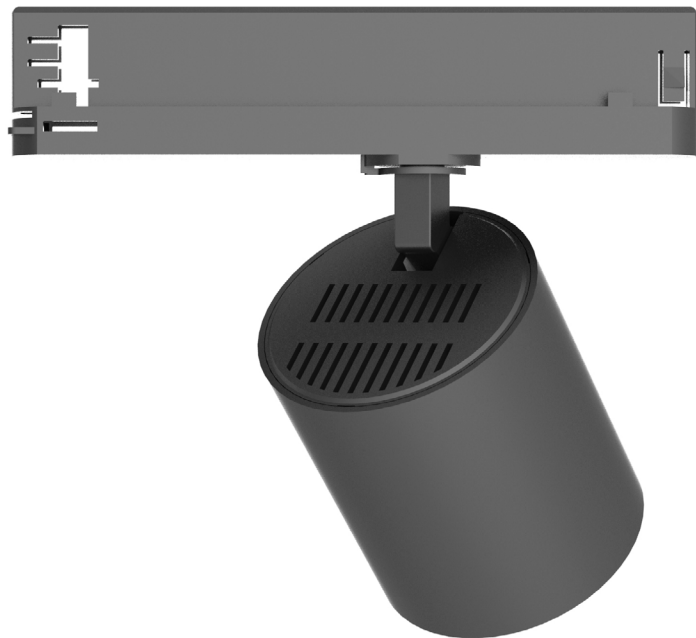

UGR<19

• Two models

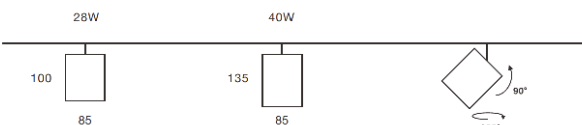

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 50 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk


FRU III - TRACK SPOT LIGHT [20W, 28W] HIGH LUMENS

Applications




etc...

LUMENS	CRI
130lm/W	90




FR85100H.20 20W
Luminus Led
20W CRI80~2310lm
355° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 18°,27°
CRI>80, CRI>90
Power gear track adapter driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL36C90
PN41C10




FR85100H.20 28W
Luminus Led
28W CRI80~3120lm
355° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 18°,27°
CRI>80, CRI>90
Power gear track adapter driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL37C90
PN42C20

• Two models



135lm/W



IP	CRI	Warranty
20	90	5 Years

MOQ 50 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
PHOTOMETRIC CURVES CONTACT US Nelux provide you shortly


www.nelux.com.hk

RIN DOTS I [40W]

Applications



SDCM	UGR
<= 3	<= 19

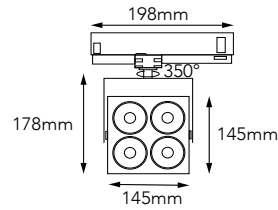

TL145145.40
Track Spotlight 40W
LUMINUS LED
CRI90 ~3800lm
Beam angle 10°,20°,36°,60°
CCT 2700K, 3000K, 4000K
POWER Three phase Adaptor
Material: Aluminum
CTN: 15pcs
Internal Reference: PL56C80
PN63C75



www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

CCT



IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

MOQ 100 Uds

Finished color	
Sand white	
Sand black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

RIN DOTS II [45W]

Applications



SDCM	UGR
<= 3	<= 19

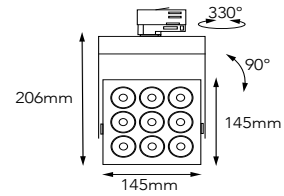

TL145145.45
Track Spotlight 45W
LUMINUS LED
CRI90 ~3800lm
Beam angle 10°, 20°, 36°, 60°
CCT 2700K, 3000K, 4000K
POWER Three phase Adaptor
Material: Aluminum
CTN: 15pcs
Options 0-10V, Triac dim.6 wires
Internal Reference: PL77C80
PN86C65



www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

CCT



IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

MOQ 100 Uds

Finished color	
Sand white	
Sand black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

RIN ROUND I [15W, 20W, 28W]

Applications




CRI	LENS
90	Multiple




TL86100.15 15W

LED:Luminus
Diffuser Lens
Power:15W
Flux(Lm): ~1370Lm
CCT 3000K,4000K
Angle: 10°,20°,36°,60°
CTN: 20pcs
Material: Aluminum
Internal Ref.PL37C60
PN41C80



TL100113.20 20W

LED:Luminus
Diffuser Lens
Power:20W
Flux(Lm): ~1960Lm
CCT 3000K,4000K
Angle: 17°,23°,42°, 45° 60°
CTN: 20pcs
Material: Aluminum
Internal Ref.PL44C10
PN44C60




TL120132.28 28W


LED:Luminus
Diffuser Lens
Power:28W
Flux(Lm): ~2715Lm
CCT 3000K,4000K
Angle: 15°,24°,36°
CTN: 16pcs
Material: Aluminum
Internal Ref.PL44C50
PN49C75

Optional Lens


TL86100.15 15W




TL100113.20 20W






TL120132.28 28W



Optional Anti glares

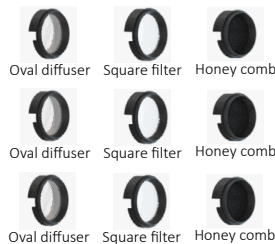

OPTIONS



Optional driver

2700K **Optional CCT**



Optional Led

MOQ 100 Uds

CCT
3000K
4000K

IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

Finished color
Sandy white
Sandy black

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

RIN ROUND II [15W, 20W, 28W]


Applications




CRI	LENS
90	Multiple



TL8097.15B 15W
LED:Luminus
Diffuser Lens
Power:15W
Flux(Lm): ~1370Lm
CCT 3000K,4000K
Angle: 10°,20°,36°,60°
CTN: 20pcs
Material: Aluminum
Internal Ref.PL37 60
PN41C80




TL100113.20B 20W
LED:Luminus
Diffuser Lens
Power:20W
Flux(Lm): ~1960Lm
CCT 3000K,4000K
Angle: 17°,23°,42°, 45° 60°
CTN: 20pcs
Material: Aluminum
Internal Ref.PL40 10
PN44C60




TL120132.28B 28W
LED:Luminus
Diffuser Lens
Power:28W
Flux(Lm): ~2715Lm
CCT 3000K,4000K
Angle: 15°,24°,36°
CTN: 16pcs
Material: Aluminum
Internal Ref.PL44 50
PN49C75

Optional Lens


TL8097.15B 15W




TL100113.20B 20W



TL120132.28B 28W



Optional Anti glares

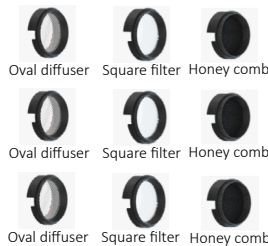


OPTIONS



Colour temperature Changeable



Dimmable (0-1 0V / Triac / DALi Optional)



Optional driver



Optional Led

2700K **Optional CCT**


MOQ 100 Uds

CCT



IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly



www.nelux.com.hk

HOFF I [30W, 40W]

Applications





CRI
90



TS85165_30
Track Spotlight 30W
CRI90 ~2730lm
Beam angle 15°,24°,38°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
POWER Three phase Adaptor
CITIZEN COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL25 50
PN28C85

TS95195_40
Track Spotlight 40W
CRI90 ~3830lm
Beam angle 15°,24°,38°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
POWER Three phase Adaptor
CITIZEN COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL27 50
PN30C65

PHOTOMETRIC CURVE

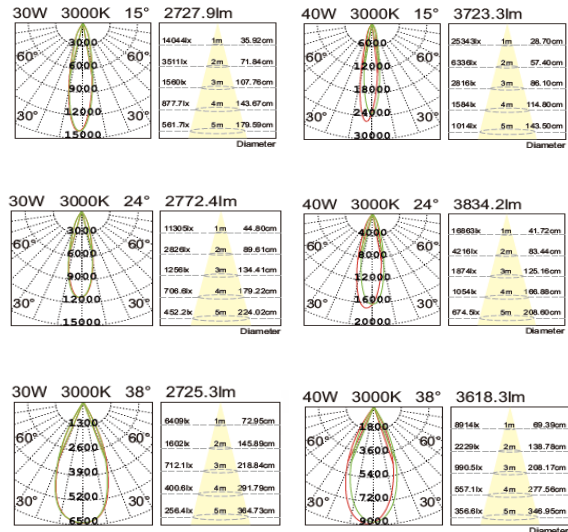

TS75145.20 TS75145.25
Track Spotlight 20W,25W
CRI90 ~1780lm , ~2250lm
Beam angle 15°,24°,38°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
POWER Three phase Adaptor
CITIZEN COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL24C50
PN27C55



Track Type



Recessed Type



Surface Type

CCT

2700K	3000K	4000K
-------	-------	-------

IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color

Sand white	
Sand black	


PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

HOFF II [15W, 25W]


Applications




CRI	ZOOM
90	15° ~ 55°



TS70188_15
Track Spotlight 15W
CRI90 ~630lm to ~820lm
Beam angle 15° ~ 55°
CCT Adjust 2700K, 3000K, 4000K
Matt White RAL 9010
GLOBAL Three phase Adaptor
Toyon COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL44 70
PN49C95




TS85194_25
Track Spotlight 25W
CRI90 ~1380lm to ~1537lm
Beam angle 15° ~ 55°
CCT Adjust 2700K, 3000K, 4000K
Matt White RAL 9010
GLOBAL Three phase Adaptor
Toyon COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL55 80
PN62C00



TS85165_25
Track Spotlight 25W
CRI90 ~1380lm to ~1537lm
Beam angle 15° , 50°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
GLOBAL Three phase Adaptor
Citizen COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL57 80
PN64C35

PHOTOMETRIC CURVE

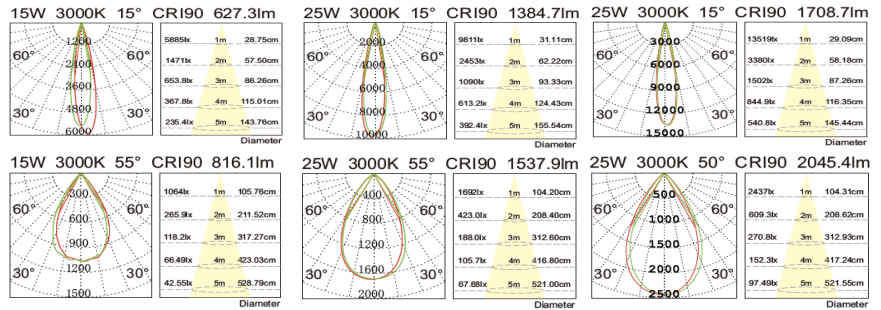

Track Type



Recessed Type



Surface Type

TS70188 15W ZOOM | CCT Adjust |0-10V
TS85194 25W ZOOM |CCT Adjust |0-10V
TS85165 25W ZOOM |0-10V

CCT		
2700K	3000K	4000K

IP	CRI	Warranty
20	90	5 Years

MOQ 100 Uds

Finished color	
Sand white	
Sand black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly



www.nelux.com.hk

HOFF III [25W, 35W]

Applications



CRI
90











TS9295_25

Track Spotlight 25W
CRI90 ~2600lm
Beam angle 15°,24°,36°,54°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
GLOBAL Three phase Adaptor
BRIDGELUX COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL29 90
PN33C25

TS9295_35

Track Spotlight 35W
CRI90 ~3100lm
Beam angle 15°,24°,36°,54°
CCT 2700K, 3000K, 4000K
Matt White RAL 9010
GLOBAL Three phase Adaptor
BRIDGELUX COB LED,
XZ Power Driver.
Material: Aluminum
Internal Reference: PL31 20
PN34C75

PHOTOMETRIC CURVE

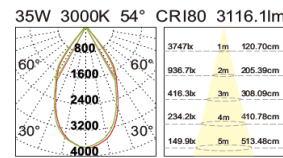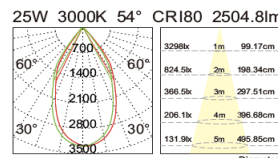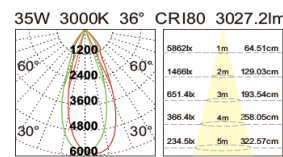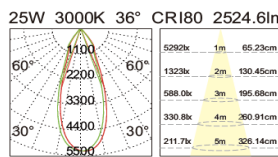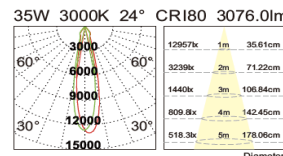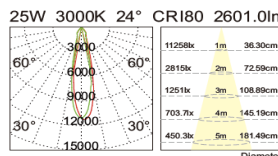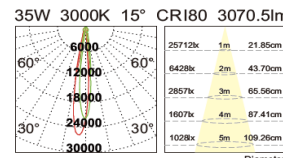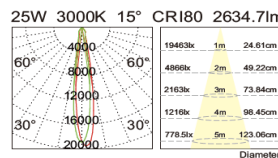

CCT




IP
20

CRI
90

Warranty
5 Years

MOQ 100 Uds

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

MUSEUM SERIES

Productos TOP para tus proyectos
High end products for your lighting projects

Nelux Architectural Lighting Products

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

Applications




MAX H [20W, 30W]


Multiple track lights in just one
Changeable Beam Angle
Changeable CCT
Adjustable Brightness
Light Shapes can be adjustable

CRI	ZOOM
90	10° ~ 60°


MAX H-A

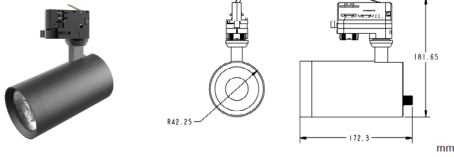



MAX H-B

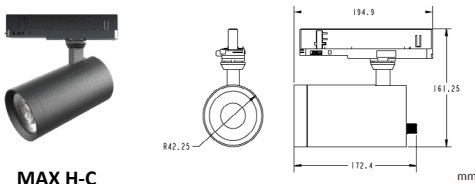

MAX H-C

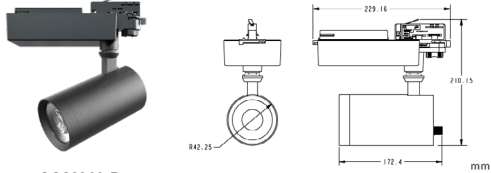


MAX H-D

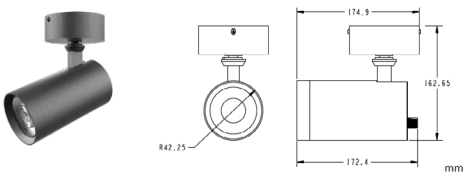




MAX H
Light source Standard, CCT Adjust (3000K,4000k,5700K)
Material Aluminum
Wiring 2Wires,3Wires,4Wires
Power 20W,30W
Beam angle 12°,24°,38°,60° - 10°~60°
CRI 90, as an option CRI92,95,97
PF>0.9
CCT 2700K,3000K,4000K,5000K,6000K
Lumens 90-100lm/W
Input Voltage AC200-240V 50/60Hz, Multivoltage
Output Voltage DC36V
Binning Initial < 3 MacAdam

Accessories



Internal Reference
31C25 30W lifud no dimmable PN34C85
33C80 30W triac PN37C60
37C20 30W 0-10v dimmable PN41C45
32C70 30W CCT adjustable lifud no dimmable PN36C45
35C50 30W CCT adjustable triac PN39C55
38C70 30W CCT adjustable 0-10V PN43C10

OPTIONS



CCT	2700K	3000K	4000K

IP	CRI	Warranty	SDCM
20	90	5 Years	<= 3

MOQ 100 Uds

Finished color
Sandy white
Sandy black

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL I [5W, 7W]

Applications



CRI	LENS
90	20°, 30°, 50°

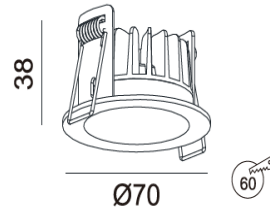

SL7038 5W/7W(lens)

CREE COB (bridgelux / CITIZEN

Optional)

5W~410lm & 7W ~520lm

Beam angle 20°, 30°, 50°

90 (95/97 Optional)

PCS/CNT: 30 pcs .


Material: Aluminum Die-Casting

Internal Reference: PL10 40

PN11C55




PHOTOMETRIC CURVE

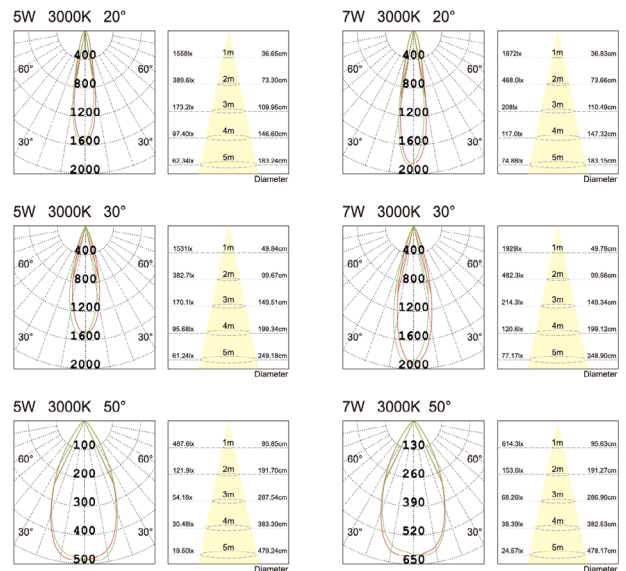

OPTIONS

Colour temperature Changeable



Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color

Sand white	
Sand black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL II [10W]

Applications



CRI	LENS
90	24°, 36°, 60°

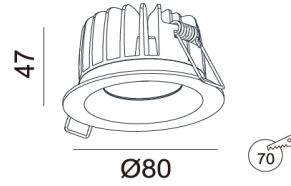

SL8047 10W(lens)

CREE COB (bridgelux / CITIZEN

Optional)

10W ~870lm

Beam angle 24°, 36°, 60°

90 (95/97 Optional)

PCS/CNT: 20 pcs .


Material: Aluminum Die-Casting

Internal Reference: PL14 96

PN16C75




PHOTOMETRIC CURVE

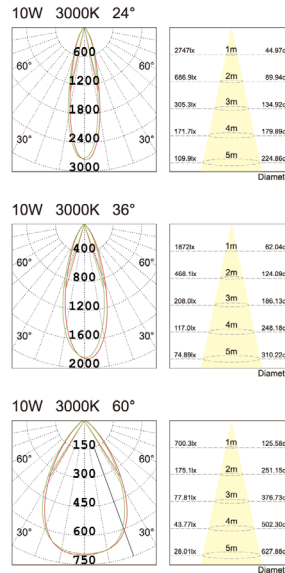

OPTIONS

Colour temperature Changeable



Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)



Optional reflector 15°, 24°, 38°, 60°

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color
Sand white

Sand black

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL III [5W, 7W] ADJUSTABLE


Applications



CRI	LENS
90	20°,30°,50°

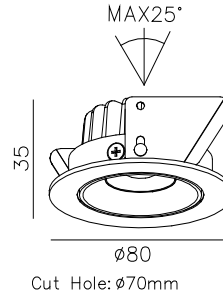


SL8035T 5W(lens)
 CREE COB (bridgelux / CITIZEN)
 Optional)
 5W ~410lm
 Beam angle 20°, 30°, 50°
 90 (95/97 Optional)
 PCS/CNT: 20 pcs .
 Material: Aluminum Die-Casting
 Internal Reference: PL11 10
 PN12C45

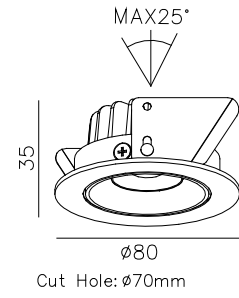

SL8035T 7W(lens)
 CREE COB (bridgelux / CITIZEN)
 Optional)
 7W ~520lm
 Beam angle 20°, 30°, 50°
 90 (95/97 Optional)
 PCS/CNT: 20 pcs .
 Material: Aluminum Die-Casting
 Internal Reference: PL11 10
 PN12C45



PHOTOMETRIC CURVE

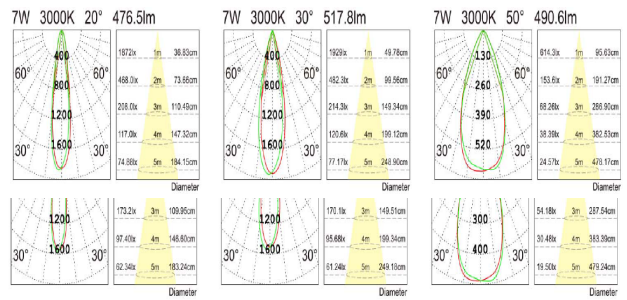

OPTIONS

Colour temperature Changeable

Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)

Optional reflector 15°, 24°, 38°, 60°

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color
 Sand white
 Sand black

PHOTOMETRIC CURVE
 Please contact us sales@nelux.com.hk Nelux provide you shortly


TEGAL IV [10W] ADJUSTABLE

Applications



etc...

CRI	LENS
90	24°,36°,60°

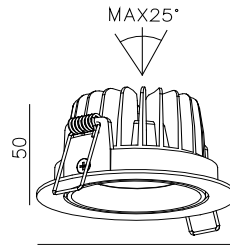

Cut Hole: \varnothing 83mm

SL9050 10W(lens)

CREE COB (bridgelux / CITIZEN Optional)

10W ~880lm

Beam angle 24°, 36°, 60°

90 (95/97 Optional)

PCS/CNT: 20 pcs .


Material: Aluminum Die-Casting

Internal Reference: PL14 20

PN15C90



PHOTOMETRIC CURVE

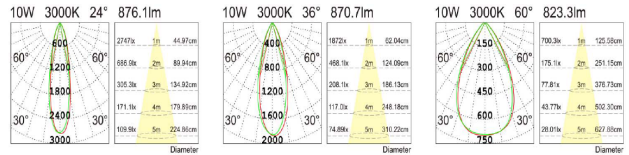

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)



Optional reflector 15°, 24°, 38°, 60°

CCT



IP
20

CRI
90

Warranty
5 Years

MOQ 200 Uds

Finished color

Sand white

Sand black

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL V [5W, 7W] ADJUSTABLE

Applications




CRI	LENS
90	20°,30°,50°

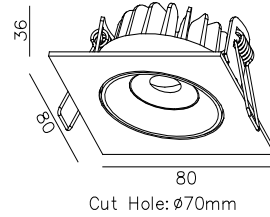

SL8036S 5W(lens)

CREE COB (bridgelux / CITIZEN Optional)
5W ~410lm
Beam angle 20°, 30°, 50°
90 (95/97 Optional)
PCS/CNT: 20 pcs .
Material: Aluminum Die-Casting
Internal Reference: PL11 60
PN12C85

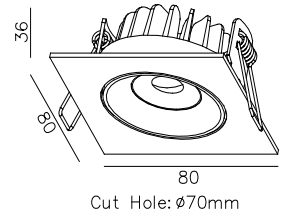


SL8036S 7W(lens)

CREE COB (bridgelux / CITIZEN Optional)
7W ~520lm
Beam angle 20°, 30°, 50°
90 (95/97 Optional)
PCS/CNT: 20 pcs .
Material: Aluminum Die-Casting
Internal Reference: PL11 60
PN12C85




PHOTOMETRIC CURVE

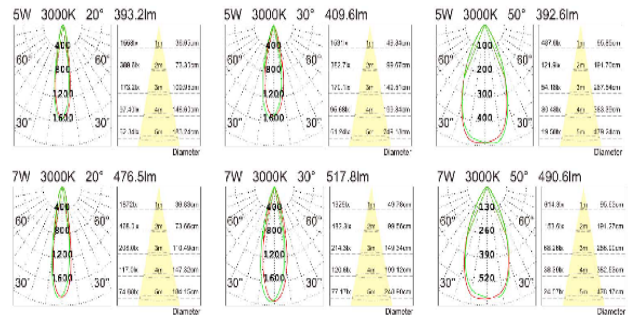

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)



Optional reflector 15°,24°,38°, 60°

CCT



IP
20

CRI
90

Warranty
5 Years

MOQ 200 Uds

Finished color

Sand white	
Sand black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL VI [10W] ADJUSTABLE

Applications



CRI	LENS
90	24°,36°,60°

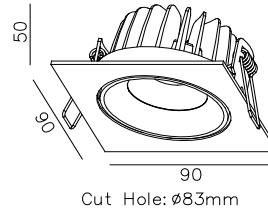


SL9047Q 10W(lens)

CREE COB (bridgelux / CITIZEN)
Optional)
10W ~880lm
Beam angle 24°, 36°, 60°
90 (95/97 Optional)
PCS/CNT: 20 pcs .
Material: Aluminum Die-Casting
Internal Reference: PL14 79
PN16C60



PHOTOMETRIC CURVE

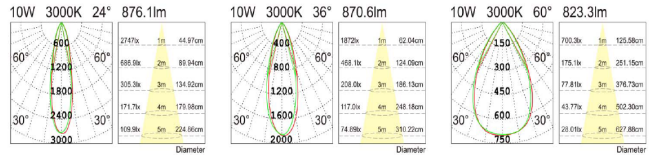


OPTIONS

Colour temperature Changeable



Dimmable (0-1 0V / Triac / DALi Optional)



CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color
Sand white
Sand black



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

TEGAL VII [15W, 18W]

Applications





CRI	LENS
90	24°, 36°, 60°

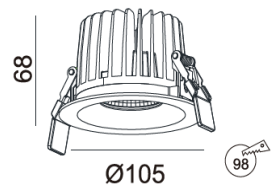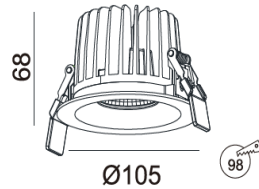

SL10568 15W(lens)
 CREE COB (bridgelux / CITIZEN Optional)
 15W ~1340lm
 Beam angle 15°, 24°, 50°
 90 (95/97 Optional)
 PCS/CNT: 20 pcs .
 Material: Aluminum Die-Casting
 Internal Reference: PL21 85
 PN24C65

SL10568 18W(lens)
 CREE COB (bridgelux / CITIZEN Optional)
 18W ~1560lm
 Beam angle 15°, 24°, 50°
 90 (95/97 Optional)
 PCS/CNT: 20 pcs .
 Material: Aluminum Die-Casting
 Internal Reference: PL21 85
 PN24C65

PHOTOMETRIC CURVE

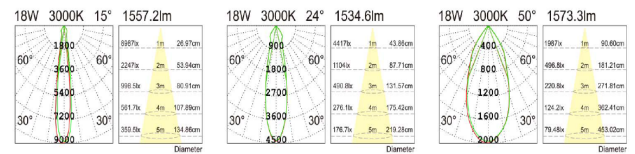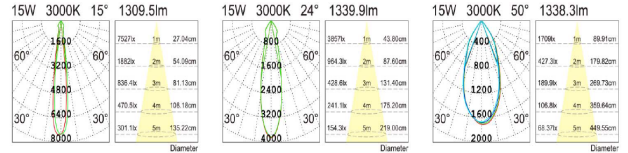

OPTIONS

Colour temperature Changeable

Optional driver
 TRIDONIC ACTEC PHILIPS

Dimmable (0-1 0V / Triac / DALi Optional)

Optional reflector 15°, 24°, 38°, 60°
 Reflector Optional

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color
 Sand white
 Sand black

PHOTOMETRIC CURVE
 Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

TEGAL VIII [15W] ADJUSTABLE

Applications



CRI	LENS
90	24°,36°,60°

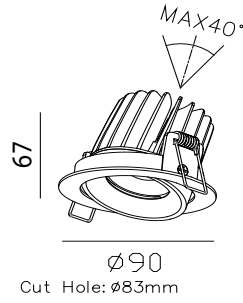

SL9079T 15W(lens)

CREE COB (bridgelux / CITIZEN

Optional)

15W ~1398lm

Beam angle 24°, 36°, 60°

90 (95/97 Optional)

PCS/CNT: 18 pcs .


Material: Aluminum Die-Casting

Internal Reference: PL21 18

PN23C60




PHOTOMETRIC CURVE

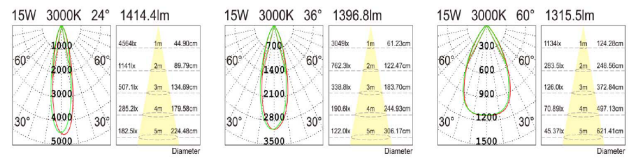

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)



Optional reflector 15°, 24°, 38°, 60°

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 200 Uds

Finished color	Color
Sand white	
Sand black	

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly



www.nelux.com.hk

TEGAL OUT I IP65 [10W] ADJUSTABLE

Applications



CRI	LENS
80	24°,36°,60°

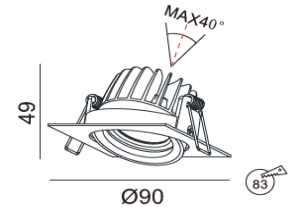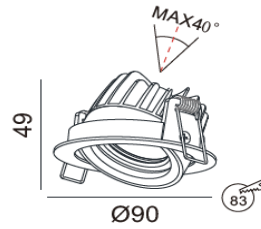







SL9049R 10W

CREE COB
10W ~880lm
Beam angle 24° 36° 60°
CRI>80
PCS/CNT: 20 pcs .
Material: Light body made from original aluminum
Internal Reference: PL15 90 PN17C70

SL9049Q 10W


CREE COB
10W ~880lm
Beam angle 24° 36° 60°
CRI>80
PCS/CNT: 20 pcs .
Material: Light body made from original aluminum
Internal Reference: PL15 90 PN17C70

PHOTOMETRIC CURVE

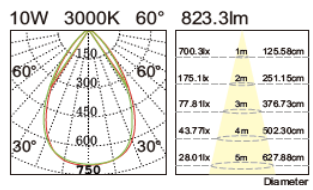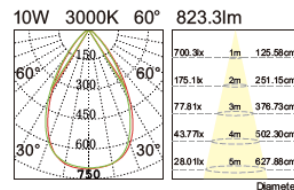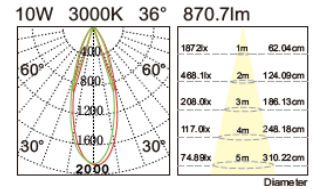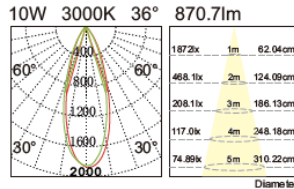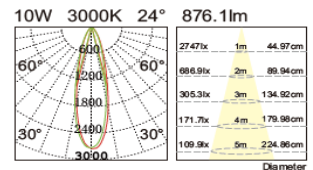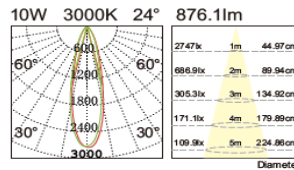

OPTIONS

Colour temperature Changeable



Optional driver

Dimmable (0-10V / Triac / DALI Optional)



Honey comb

CCT




IP
65

CRI
80

Warranty
5 Years

MOQ 100 Uds

Finished color



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly




www.nelux.com.hk

TEGAL OUT II IP65 [10W] ADJUSTABLE

Applications





CRI	LENS
80	24°,36°,60°

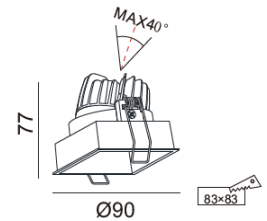

SL9077R 10W
CREE COB
10W ~850lm
Beam angle 24° 36° 60°
CRI>80
PCS/CNT: 20 pcs .
Material: Light body made from original aluminum
Internal Reference: PL15 90 PN17C70

SL9077Q 10W
CREE COB
10W ~850lm
Beam angle 24° 36° 60°
CRI>80
PCS/CNT: 20 pcs .
Material: Light body made from original aluminum
Internal Reference: PL15 90 PN17C70

PHOTOMETRIC CURVE

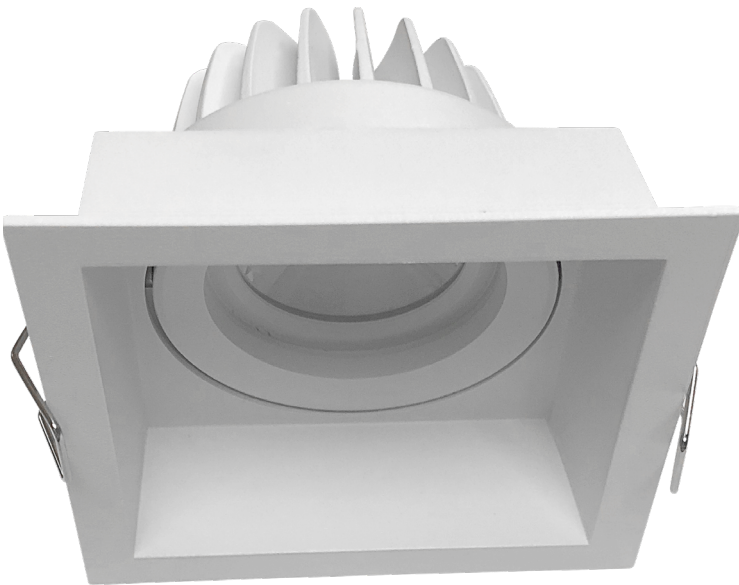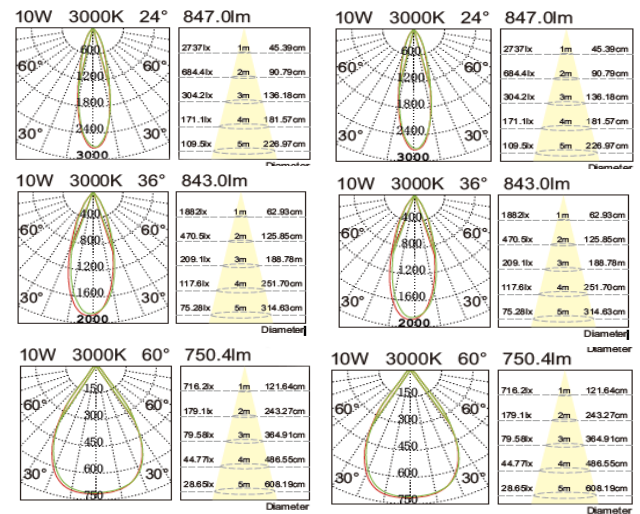


OPTIONS

Colour temperature Changeable

Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)

Honey comb



IP	CRI	Warranty
65	80	5 Years

MOQ 100 Uds

Finished color
Sand white

Sand black



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

DUKE I [15W, 25W, 35W]

Applications






CRI	POWER
80	15,25,35

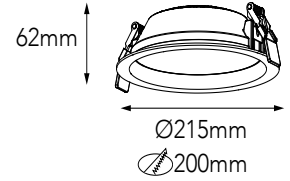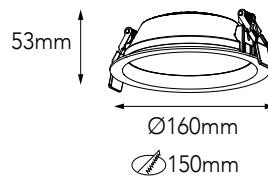

DL16053 15W
SMD EVERLIGHT-Acrylic difusser
15W ~1310lm
Beam angle 100°
CRI>80
PCS/CNT: 8 pcs .
Material: Light body made from original aluminum
Internal Reference: PL19 87
PN20C20


DL21562 25W & 35W
SMD EVERLIGHT-Acrylic difusser
25W ~2390lm
35W ~3100lm
Beam angle 100°
CRI>80
PCS/CNT: 8 pcs .
Material: Light body made from original aluminum
Internal Reference 25: PL22 66
PN25C35
Internal Reference 35: PL33 60
PN37C45

PHOTOMETRIC CURVE

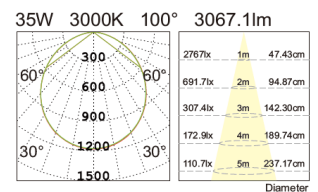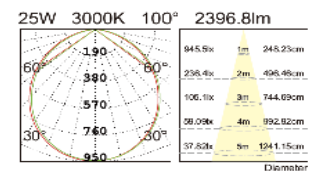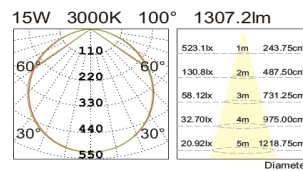

OPTIONS


Colour temperature Changeable



Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP	CRI	Warranty
20	80	5 Years

MOQ 200 Uds

Finished color
Sand white

Sand black

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

POU SERIES

POU I [10W, 15W, 30W, 35W, 40W]



Applications



OPTIONAL REFLECTORS





CRI	LENS
90	24°,36°,60°

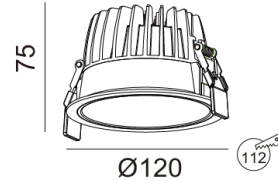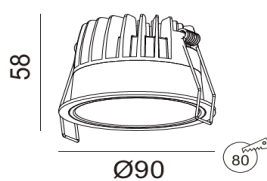

DW9058.10
SMD EVERLIGHT-Acrylic difusser
10W ~760lm
Beam angle 70°
CRI>80
PCS/CNT: 18 pcs .
Material: Light body made from original aluminum
Internal Reference: PL15 70 PN17C55


DW12075.15
SMD EVERLIGHT-Acrylic difusser
15W ~1310lm
Beam angle 70°
CRI>80
PCS/CNT: 18 pcs .
Material: Light body made from original aluminum
Internal Reference: PL18 20 PN20C35

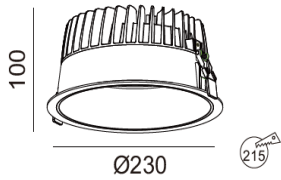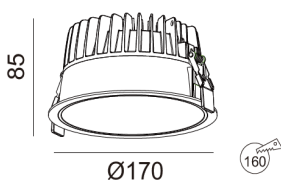

DW17085.30
SMD EVERLIGHT-Acrylic difusser
30W ~2525lm
Beam angle 70°
CRI>80
PCS/CNT: 12 pcs .
Material: Light body made from original aluminum
Internal Reference: PL23 60 PN26C75

DW230100.35
SMD EVERLIGHT-Acrylic difusser
35W ~3750lm
45W ~4000lm
Beam angle 70°
CRI>80
PCS/CNT: 12 pcs .
Material: Light body made from original aluminum
Internal Reference 35: PL29 20 PN32C55
Internal Reference 45: PL31 90 PN35C65

PHOTOMETRIC CURVE

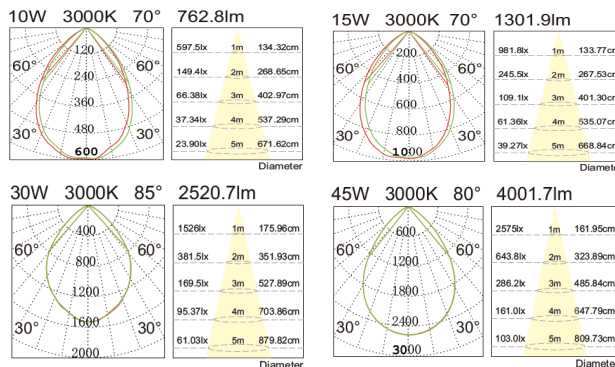

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP20	CRI	Warranty
IP44	+80	5 Years

MOQ 200 Uds

Finished color	
Sand white	
Sand black	



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

TITANI I [3W, 5W,7W] MINI SIZE FIX AND AJUSTABLE

Applications



CRI	LENS
80,90	BIG RANGE




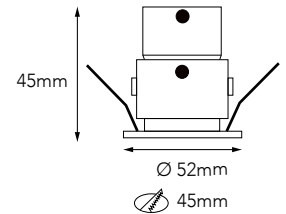
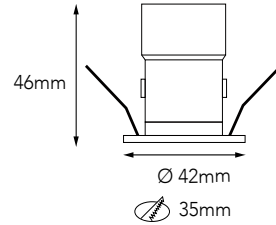


SL4246.03 3W

CREE XPG
3W ~180lm
Beam angle 10° 20° 30°
CRI>80 CRI>90 as an option
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL16 20 PN18C10

SL5245.03 3W Tiltable

CREE XPG
3W ~210lm
Beam angle 10° 20° 30°
CRI>80 CRI>90 as an option
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL17 50 PN19C65

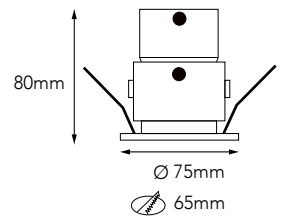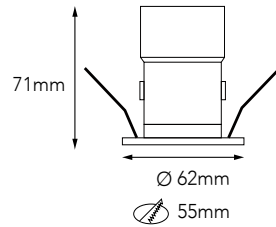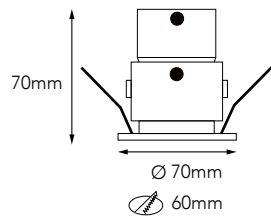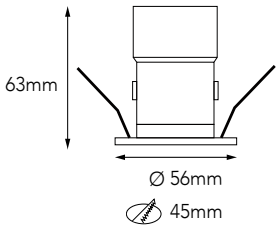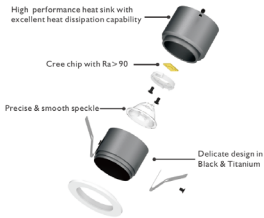

SL5663.05 5W

CREE CXA
5W ~420lm
Beam angle 15° 24° 36°
CRI>80 CRI>90 as an option
Driver Tridonic
Material: Light body made from original aluminum
Internal Reference: PL20 60 PN22C90

SL7070.05 5W Tiltable

CREE CXA
5W ~450lm
Beam angle 15° 24° 36°
CRI>80 CRI>90 as an option
Driver Tridonic
Material: Light body made from original aluminum
Internal Reference: PL22 70 PN25C35

SL6271.07 7W

CREE CXA
7W ~540lm
Beam angle 15° 24° 36°
CRI>80 CRI>90 as an option
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL22 10 PN24C65

SL7580.07 7W Tiltable

CREE CXA
7W ~560lm
Beam angle 15° 24° 36°
CRI>80 CRI>90 as an option
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL24 70 PN27C55

OPTIONS



Colour temperature Changeable




Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 100 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TITANI SERIES


TITANI II [3W, 5W,7W, 9W] MINI SIZE FIX AND AJUSTABLE

Applications




etc...


UGR	CRI	LENS
< 19	80,90	BIG RANGE





SL4564.03 3W Adjustable
CREE XPG
3W ~160lm
Beam angle 10° 20° 30°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL21 50
PN23C90




SL4556.03 3W
CREE XPG
3W ~160lm
Beam angle 10° 20° 30°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL20 60
PN22C95




SL5781.05 5W Adjustable
LUMILED
5W ~360lm
Beam angle 30° 40°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL18 10
PN20C20

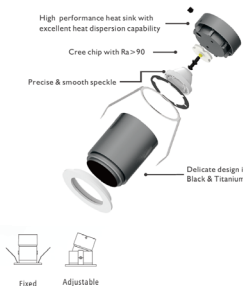


SL3843.03 3W
CREE XPG
3W ~180lm
Beam angle 10° 20° 30°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL16 60



SL5771.07 7W
CREE CXA
7W ~500lm
Beam angle 15° 24° 36°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL21 25



SL6892.07 7W Adjustable
CREE CXA
7W ~550lm
Beam angle 15° 24° 36°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL28 30



SL6884.09 9W
CREE CXA
9W ~650lm
Beam angle 15° 24° 36°
CRI>90
Driver Philips
Material: Light body made from original aluminum
Internal Reference: PL26 60

OPTIONS



Colour temperature Changeable




Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP	CRI	Warranty	UGR
20	90	5 Years	<=19

MOQ 100 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

DIAMOND [10W, 15W] FIX

Applications



POWER	CRI
10, 15	80,90

www.nelux.com.hk


Chez nelux chaque produit est un bijou

sales@nelux.com.hk



www.nelux.com.hk

nelux architectural lighting products - producing quality -



sales@nelux.com.hk





AG9269.10 10W
LED: Samsung
Diffuser Lens
Power:10W
Flux(Lm): ~1000Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 27pcs
Material: Aluminum
Internal Ref.PL18 80 PN20C90

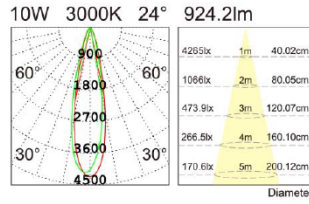


AG8169.10 10W Trimless
LED: Samsung
Diffuser Lens
Power:10W
Flux(Lm): ~1000Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 36pcs
Material: Aluminum
Internal Ref.PL18 60 PN20C70

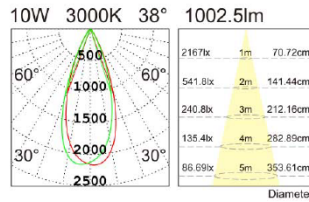

AG9289.15 15W
LED: Samsung
Diffuser Lens
Power:15W
Flux(Lm): ~1480Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 27pcs
Material: Aluminum
Internal Ref.PL20 50 PN22C85

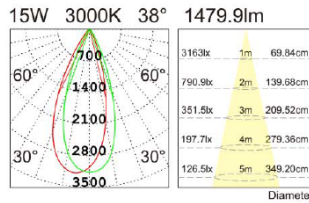

AG8189.15 15W Trimless
LED: Samsung
Diffuser Lens
Power:15W
Flux(Lm): ~1480Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 36pcs
Material: Aluminum
Internal Ref.PL20 40 PN22C75

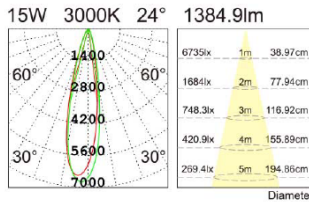

Optional reflectors




Frame changeable



OPTIONS

Colour temperature Changeable



Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)



Optional Led

CCT

2700K	3000K	4000K
-------	-------	-------

IP	CRI	Warranty
44	90	5 Years

MOQ 100 Uds

Optional Color



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

DIAMOND [10W, 15W] ADJUSTABLE

Applications



POWER	CRI
10, 15	80,90


www.nelux.com.hk

Chez nelux chaque produit est un bijou



www.nelux.com.hk

nelux architectural lighting products - producing quality -



sales@nelux.com.hk





AG10271.10 10W
LED: Samsung
Diffuser Lens
Power:10W
Flux(Lm): ~1043Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 27pcs
Material: Aluminum
Internal Ref.PL19 00 PN21C20

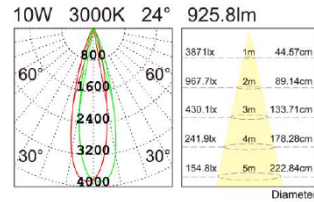


AG8871.10 10W Trimless
LED: Samsung
Diffuser Lens
Power:10W
Flux(Lm): ~1043Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 36pcs
Material: Aluminum
Internal Ref.PL19 50 PN21C70

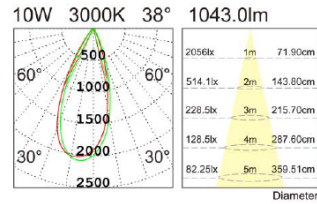

AG10291.15 15W
LED: Samsung
Diffuser Lens
Power:15W
Flux(Lm): ~1430Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 27pcs
Material: Aluminum
Internal Ref.PL20 75 PN23C15

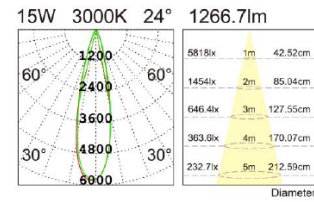

AG8891.15 15W Trimless
LED: Samsung
Diffuser Lens
Power:15W
Flux(Lm): ~1430Lm
CCT 2700K,3000K,4000K
Angle: 24°/38°
CTN: 36pcs
Material: Aluminum
Internal Ref.PL20 97 PN23C45

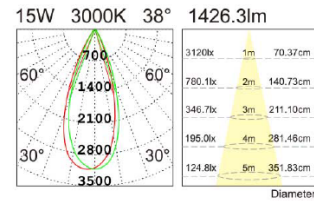

Optional reflectors




Frame changeable



OPTIONS

Colour temperature Changeable



Optional driver

Dimmable (0-1 0V / Triac / DALi Optional)



Optional Led

CCT	2700K	3000K	4000K
-----	-------	-------	-------

IP	44
CRI	90
Warranty	5 Years

MOQ 100 Uds



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

LUCEN [15W, 20W, 28W] DOWNLIGHT

Applications




SDCM	UGR	CRI
<= 3	<= 19	90




DL11549.15 15W

LED:Luminus
Diffuser Lens
Power:15W
Flux(Lm): ~1345Lm
CCT 2700K,3000K,4000K
Angle: 10°,20°,36°,60°
CTN: 32pcs
Material: Aluminum
Internal Ref.PL31 20 PN34C70



DL13053.20 20W


LED:Luminus
Diffuser Lens
Power:20W
Flux(Lm): ~1955Lm
CCT 2700K,3000K,4000K
Angle: 17°,23°,42°,60°
CTN: 32pcs
Material: Aluminum
Internal Ref.PL33 40 PN37C10






DL15052.28 28W

LED:Luminus
Diffuser Lens
Power:28W
Flux(Lm): ~2714Lm
CCT 2700K,3000K,4000K
Angle: 15°,24°,36°
CTN: 24pcs
Material: Aluminum
Internal Ref.PL37 20 PN41C50

• Accessories

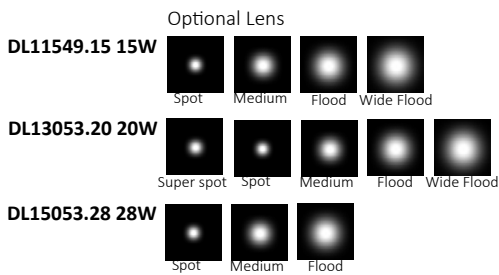

OPTIONS




CCT

2700K	3000K	4000K
-------	-------	-------

IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

MOQ 100 Uds




PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

LUCEN [15W, 20W, 28W] TRIMLESS

Applications




SDCM	UGR	CRI
<= 3	<= 19	90




DL8085.15 15W

LED:Luminus
Diffuser Lens
Power:15W
Flux(Lm): ~1400Lm
CCT 2700K,3000K,4000K
Angle: 10°,20°,36°,60°
CTN: 30pcs
Material: Aluminum
Internal Ref.PL34 80
PN38C70



DL9380.20 20W


LED:Luminus
Diffuser Lens
Power:20W
Flux(Lm): ~1770Lm
CCT 2700K,3000K,4000K
Angle: 17°,23°,42°, 45° 60°
CTN: 30pcs
Material: Aluminum
Internal Ref.PL36 90
PN41C10





DL11196.28 28W

LED:Luminus
Diffuser Lens
Power:28W
Flux(Lm): ~2380Lm
CCT 2700K,3000K,4000K
Angle: 15°,24°,36°
CTN: 18pcs
Material: Aluminum
Internal Ref.PL41 50
PN46C25

• Accessories

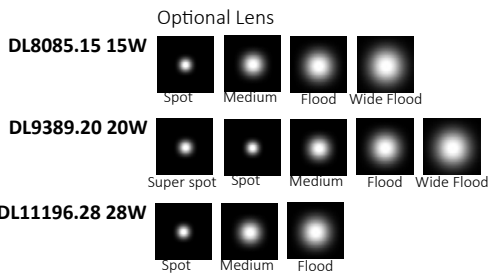

OPTIONS



MOQ 100 Uds

CCT	2700K	3000K	4000K
-----	-------	-------	-------

IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

Finished color	Sandy white	Sandy black
----------------	-------------	-------------


PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

LUCEN [15W, 20W, 28W] TRIM

Applications




SDCM	UGR	CRI
<= 3	<= 19	90




DL8044.15 15W

LED:Luminus
Diffuser Lens
Power:15W
Flux(Lm): ~1370Lm
CCT 2700K,3000K,4000K
Angle: 10°,20°,36°,60°
CTN: 30pcs
Material: Aluminum
Internal Ref.PL33 40
PN37C20



DL9349.20 20W



LED:Luminus
Diffuser Lens
Power:20W
Flux(Lm): ~1950Lm
CCT 2700K,3000K,4000K
Angle: 17°,23°,42°, 45° 60°
CTN: 30pcs
Material: Aluminum
Internal Ref.PL35 40
PN39C50






DL11155.28 28W

LED:Luminus
Diffuser Lens
Power:28W
Flux(Lm): ~2715Lm
CCT 2700K,3000K,4000K
Angle: 15°,24°,36°
CTN: 18pcs
Material: Aluminum
Internal Ref.PL39 40
PN43C80

• Accessories

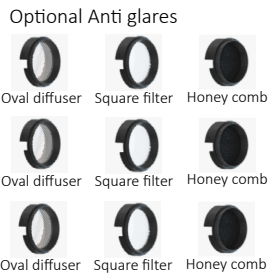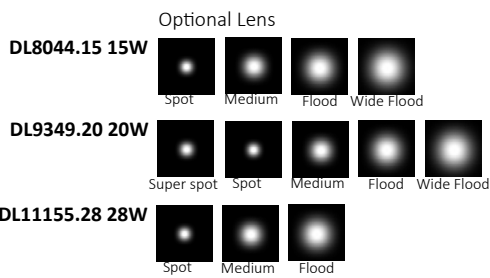

OPTIONS



MOQ 100 Uds

CCT

2700K	3000K	4000K
-------	-------	-------

IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

Finished color

Sandy white	
Sandy black	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

LUCEN [20W, 28W] MC

Applications



SDCM	UGR	CRI
<= 3	<= 19	90



DL9532.20 20W

LED:Luminus COB
Diffuser Lens
Power:20W
Flux(Lm): ~1960Lm
CCT 2700K,3000K,4000K
Angle: 17°,23°,42°, 45° 60°
CTN: 32pcs
Material: Aluminum
Internal Ref.PL37 10
PN41C40




DL11139.28 28W

LED:Luminus COB
Diffuser Lens
Power:28W
Flux(Lm): ~2720Lm
CCT 2700K,3000K,4000K
Angle: 15°,24°,36°
CTN: 24pcs
Material: Aluminum
Internal Ref.PL41 60
PN46C35

• Accessories

Optional Lens


DL9532.20 20W



Optional Anti glares




DL11139.28 28W




MOUNTING SYSTEM | SISTEMA DE MONTAJE


Two lamps mounting - Montaje dos lámparas

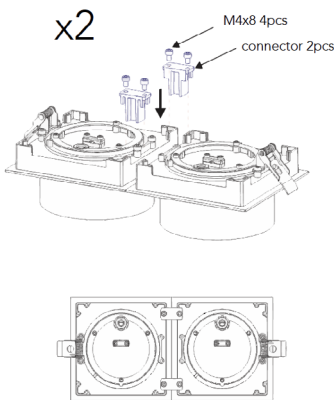

Three lamps mounting - Montaje tres lámparas

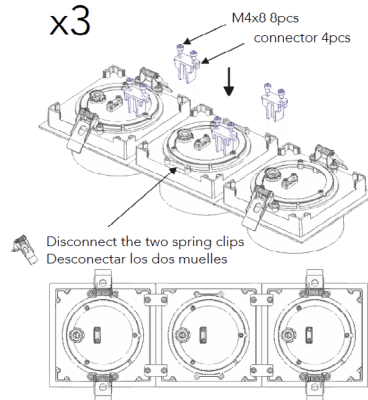

Four lamps mounting - Montaje cuatro lámparas

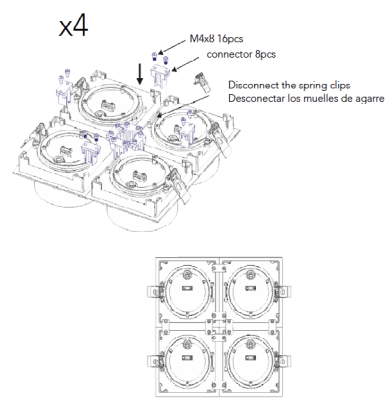

OPTIONS

Colour temperature Changeable

Dimmable (0-10V / Triac / DALI Optional)



Optional driver



Optional Led



CCT	2700K	3000K	4000K

IP	CRI	Warranty	SDCM	UGR
20	90	5 Years	<= 3	<= 19

MOQ 100 Uds

Finished color
Sandy white

Sandy black

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

INLINE

Applications




etc...



Three kind of structure **FIXED, ADJUSTABLE AND TRIMLESS**

Exclusive design.



Die-casting aluminum frame and aluminum profile heatsink
1 head, 2 heads, 3 heads, 4 heads, 5 heads and 10 heads.

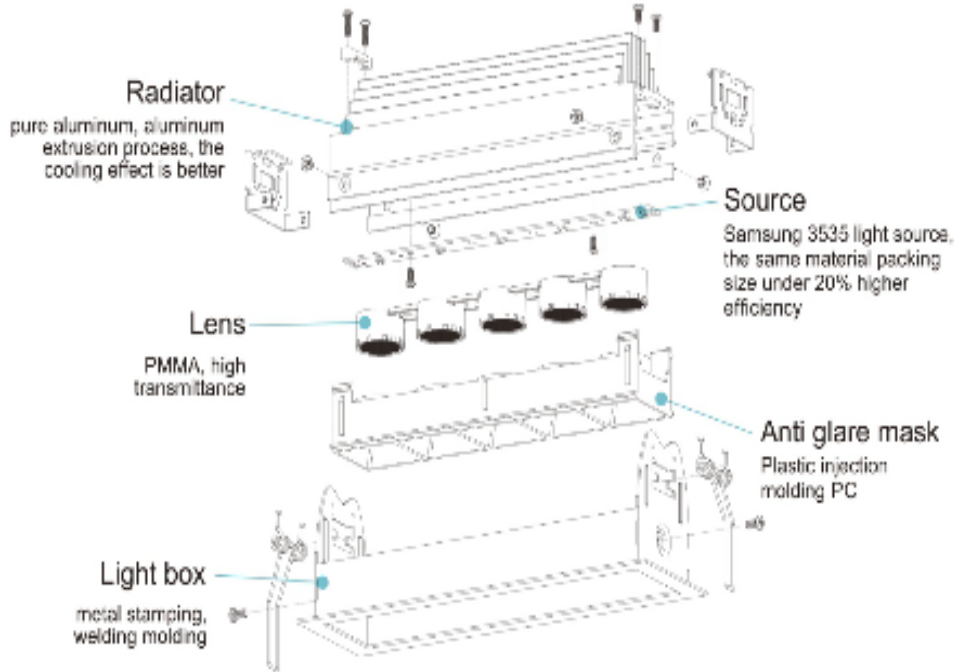


INLINE I FIXED

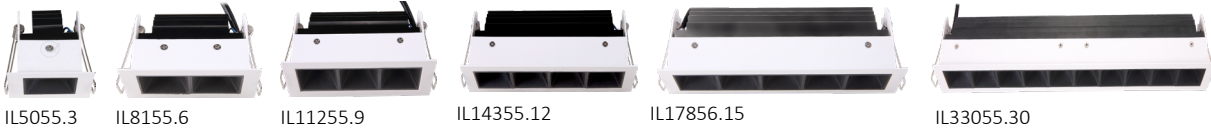

INLINE II ADJUSTABLE

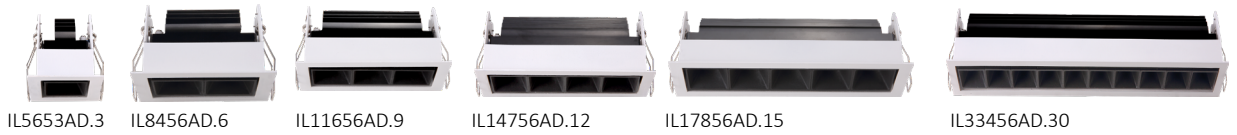

INLINE III TRIMLESS



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk





INLINE [3W, 6W, 9W, 12W, 15W, 30W] FIX


Applications




IP	CRI
20	90

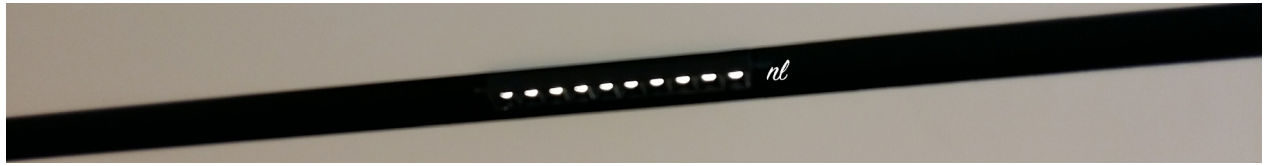


IL5055.3 3W
SAMSUNG 3535
3W ~140lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL11C20
PN12C55



IL8155.6 2X3W
SAMSUNG 3535
2x3W ~310lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL14C30
PN15C90




IL11255.9 3X3W
SAMSUNG 3535
3x3W ~510lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/48pcs
Internal Reference: PL18C30
PN20C45

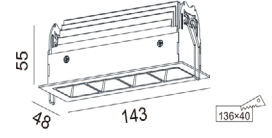


IL14355.12 4X3W
SAMSUNG 3535
4x3W ~690lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/45pcs
Internal Reference: PL21C55
PN23.95



PHOTOMETRIC CURVES CONTACT US



IL17455.15 5X3W
SAMSUNG 3535
5x3W ~910lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/30pcs
Internal Reference: PL25C10
PN27C90




IL33055.30 10X3W
SAMSUNG 3535
10x3W ~1930lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/15pcs
Internal Reference: PL38C75
PN43C15

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 100 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



INLINE [3W, 6W, 9W, 12W, 15W, 30W] ADJUSTABLE

Applications




etc...

IP	CRI
20	90

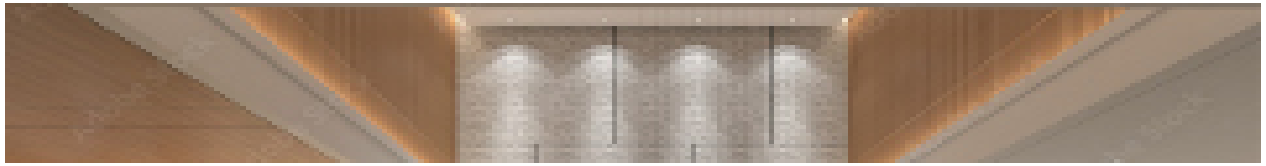


IL5653AD.3 3W

SAMSUNG 3535
3W ~140lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL12C20
PN13C60

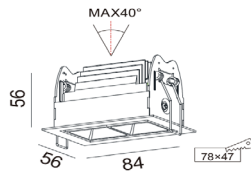


IL8456AD.6 2X3W

SAMSUNG 3535
2x3W ~310lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL15C30
PN17C10



IL11656AD.9 3X3W

SAMSUNG 3535
3x3W ~510lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/48pcs
Internal Reference: PL19C30
PN21C55

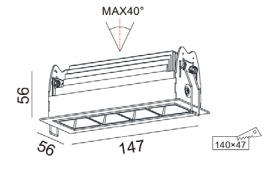


IL14756AD.12 4X3W

SAMSUNG 3535
4x3W ~690lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/45pcs
Internal Reference: PL22C55
PN25C15




PHOTOMETRIC CURVES CONTACT US

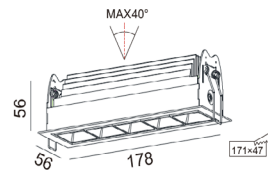

IL17856AD.15 5X3W

SAMSUNG 3535
5x3W ~910lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/30pcs
Internal Reference: PL26C10
PN29C20

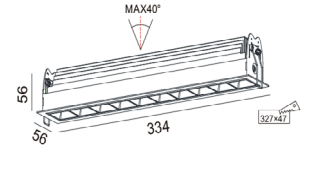

IL33456AD.30 10X3W

SAMSUNG 3535
10x3W ~1930lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/15pcs
Internal Reference: PL39C75
PN44C60

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP
20

CRI
90

Warranty
5 Years

MOQ 100 Uds

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly


www.nelux.com.hk

INLINE [3W, 6W, 9W, 12W, 15W, 30W] TRIMLESS


Applications




IP	CRI
20	90




IL4557TL.3 3W
SAMSUNG 3535
3W ~140lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL13C70
PN15C35

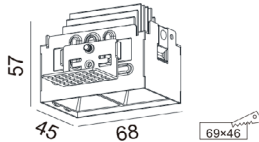

IL6857TL.6 2X3W
SAMSUNG 3535
2x3W ~310lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/60pcs
Internal Reference: PL16C80
PN18C70




IL9957TL.9 3X3W
SAMSUNG 3535
3x3W ~510lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/48pcs
Internal Reference: PL20C80
PN23C25

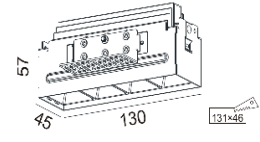


IL13057TL.12 4X3W
SAMSUNG 3535
4x3W ~690lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/45pcs
Internal Reference: PL24C05
PN26C85



PHOTOMETRIC CURVES CONTACT US

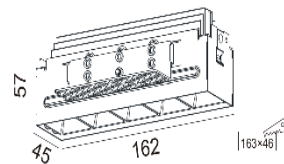

IL16257TL.15 5X3W
SAMSUNG 3535
5x3W ~910lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/30pcs
Internal Reference: PL27C60
PN30C70




IL31857.30 10X3W
SAMSUNG 3535
10x3W ~1930lm
Beam angle 15° 30° 50°
CRI>90
Driver Eaglerise,Khun,Philips
Material:Die-casting alminum frame and alminum profile heatsink
CTN/15pcs
Internal Reference: PL41C25
PN45C85

OPTIONS



Colour temperature Changeable



Optional driver



Dimmable (0-1 0V / Triac / DALi Optional)

CCT



IP
20

CRI
90

Warranty
5 Years

MOQ 100 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TUTTO LIGHTING SYSTEM SERIES MAGNETIC AND MAINS VOLTAGE

Long or short, big or small, white finish or colored, spot or wall washer, zoomer or projector, highly efficient or low glare, mains voltage or 48V magnet, you can always find a suitable solution from the TUTTO system for your growing lighting tasks in different spaces like shop displays, private homes, restaurants, hotels and art exhibitions. The flexibility and multi-function system makes it truly a versatile lighting tool for architects and designers.

• Versatile Lighting Tool

All type of accessories




All type of finishes



CRI



Smart Lighting Control



CCT Adjustable



The flexibility and multi-function system makes it truly a versatile lighting tool for architects and designers.



TUTTO SERIES

TUTTO MAGNETIC DC48V - MAIN VOLTAGE AC220V-240V or AC110-127V TRACK - RECESSED,SURFACE & PENDANT

Applications



IP	CRI
20	90

MAGNETIC DC48V

TRACK SPOT LIGHT



TRACK SUSPENDED LAMP



MAIN VOLTAGE AC220V-240V or AC110-127V TRACK

TRACK SPOT LIGHT



ZOOMABLE



WALLWASHER-ASYMMETRIC



TRACK PENDANT LAMP



MAIN VOLTAGE AC220V-240V or AC110-127V RECESSED,SURFACE & PENDANT

RECESSED-SPOT



SURFACE SPOT



RECESSED PENDANT



SURFACE PENDANT



SURFACE



RECESSED



CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 100 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TUTTO TRACK MAGNETIC 48V - TUTTO TRACK MAIN VOLTAGE AC220-240V / AC110-127V


Applications



IP	CRI
20	90

48V TRACK


MAIN VOLTAGE

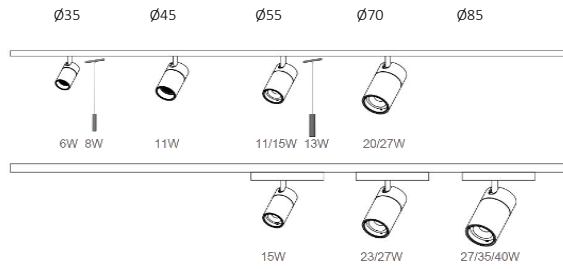


- (1) Complete optics solution and interchangeable lens and snap-in accessories
 - (2) Smart control 1-10V, Knob dimming, Dali, Casambi
 - (3) Customised colour and texture
 - (4) CCT Adjustable
 - (5) CRI Options CRI >90, >95, >97, Full Spectrum
- Versatile lighting product for architects and lighting designers

- (1) Complete optics solution and interchangeable lens and snap in accessories


Spotlights

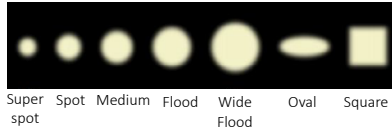


Zoom




Wallwasher



Frame

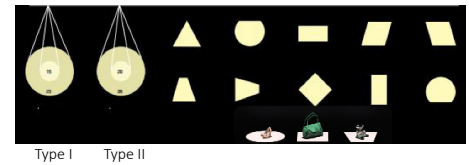


- (2) Smart control 1-10V, Knob dimming, Dali, Casambi

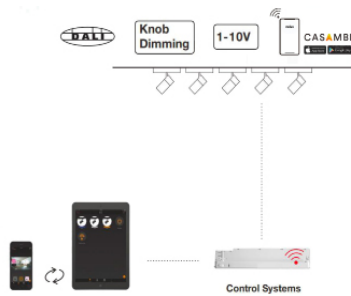

Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart TUTTO lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

- (1) Interchangeable Lens and Snap in accessories

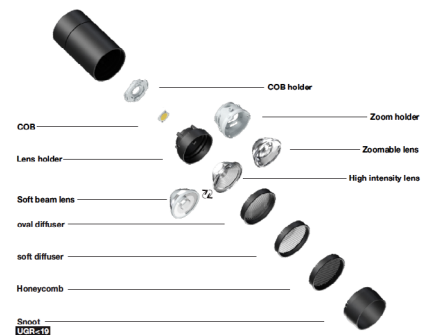

- (3) Customised colour and texture

Standard Finished



Sandy Black Sandy White

Special Finishes



Brushed Brass Brushed Copper Chrome Plated Brushed Gold


Special Texture



Arrow Rectangle

- (4) CCT adjustable

This technology is incorporated in all TUTTO product except the zoom lens and framer series. Triac and Dali controlled solutions are available.

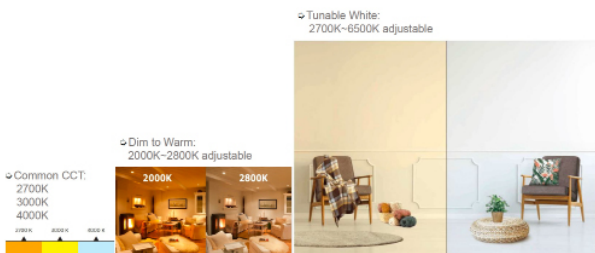

- (5) CRI Options CRI >90, >95, >97, Full Spectrum

Nelux offers several CRI options:

- >90
- >95
- >97

Full Spectrum Full-spectrum LED lighting delivers measurable improvements through a higher Colour Render Index (CRI) and makes colours much more vivid, more natural. In every setting, from food to clothing, jewellery, furniture and fabrics, the effect of full spectrum LED lighting is stunning. Every colour across the full range, from pastels to brights are rendered as they are meant to be.



Color Rendering Index

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

MAGNETIC TRACK DC48V

Applications




VOLTAGE	IP	CRI
DC48V	20	90




TUTTO 48V MAGNETIC With its miniaturized design and various glare control accessories, there is a room for low voltage series anywhere where accent and diverse lighting effects are needed.

This multi-functional product, combined with a compact low voltage/magnetic track, makes it a perfect choice for growing lighting demands in different spaces like shop displays, private homes, restaurants, hotels and art exhibitions. With a few centimeters in size, the flexibility and multi-function makes it truly a versatile lighting tool for architects and designers.


• Easy Installation

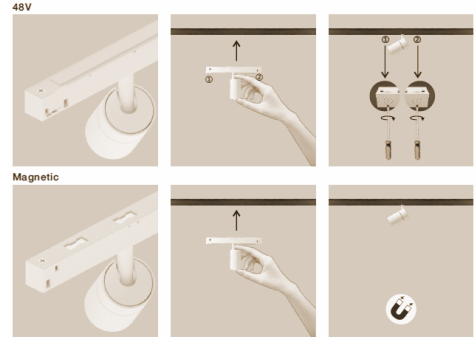

• Four different sizes



• Different Tracks

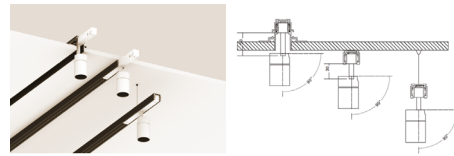

• Customised Colour and Texture




Customising



Mini Size



• Lighting Control

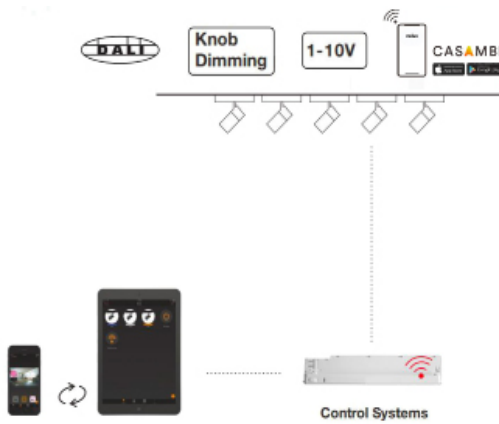

Application



Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart TUTTO lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



MAGNETIC TRACK SPOT LIGHT DC48V [Ø35mm, Ø45mm, Ø55mm, Ø70mm]

Applications




etc...

VOLTAGE	IP	CRI
DC48V	20	90




DIAMETER 35mm



TT3560.6 6W

Luminus Led
6W ~550lm
CCT 3000K, 4000K
Beam angle 16° 24° 34°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL28C00
PN31C20


DIAMETER 35mm



TT3560.12 2x6W

Luminus Led
2x6W ~2x550lm
CCT 3000K, 4000K
Beam angle 16° 24° 34°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL37C90
PN42C25


DIAMETER 45mm



TT4575.11 11W

Luminus Led
11W ~810lm
CCT 3000K, 4000K
Beam angle 14° 20° 33° 56°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL29C50
PN32C80


DIAMETER 45mm



TT4575.22 2x11W

Luminus Led
2x11W ~2x810lm
CCT 3000K, 4000K
Beam angle 14° 20° 33° 56°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL40C50
PN45C00


DIAMETER 55mm



TT5595.15 15W

Luminus Led
15W ~1200lm
CCT 3000K, 4000K
Beam angle lens 15° 20° 39° 50°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL34C20
PN38C00


DIAMETER 70mm



TT70118.20 20W

Luminus Led
20W ~1720lm
CCT 3000K, 4000K
Beam angle 15° 20° 39° 50°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL
PN ask for price

DIAMETER 70mm

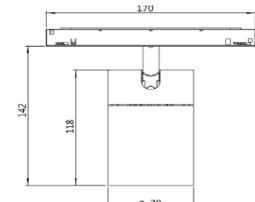

TT70118.27 27W

Luminus Led
27W ~2650lm
CCT 3000K, 4000K
Beam angle 16° 22° 34° 43°
CRI>90
Local Driver
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL
PN ask for price

CCT



IP	CRI	Warranty
20	90	5 Years

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

MAGNETIC TRACK SPOT LIGHT DC48V [Ø35mm, Ø45mm, Ø55mm, Ø70mm] ACCESSORIES





Applications



VOLTAGE	IP	CRI
DC48V	20	90

• Accessories




Accessories Ø35mm

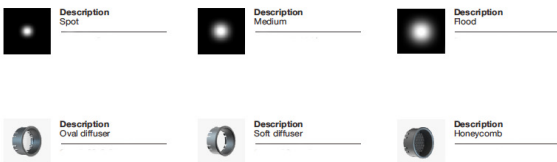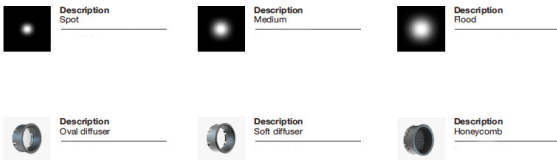


Accessories Ø55mm



Accessories Ø45mm

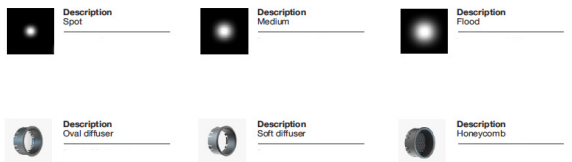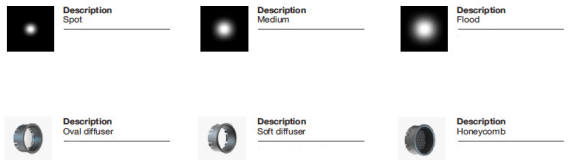

Accessories Ø70mm



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



MAGNETIC TRACK SUSPENDED LAMP DC48V [Ø35mm, Ø55mm]



Applications




etc...

VOLTAGE	IP	CRI
DC48V	20	90

TUBE LENGTH 200mm,255mm,600mm

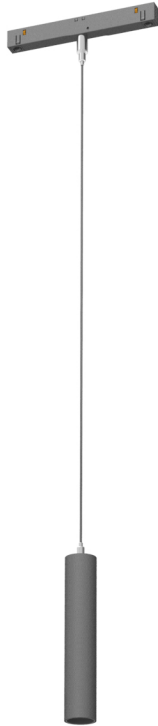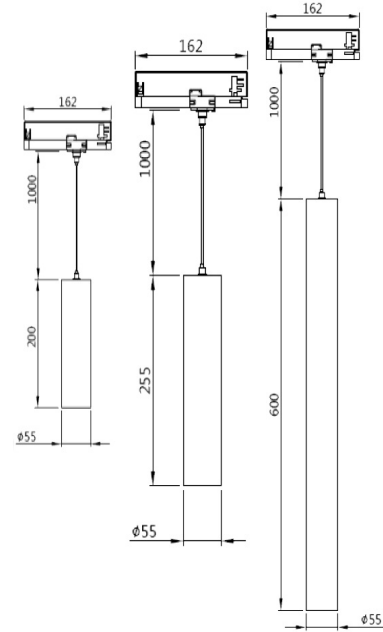

TUBE LENGTH 150mm,400mm,800mm

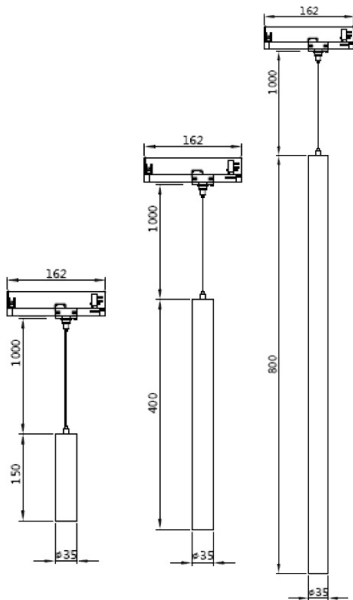

TT35150.06 6W
TT35400.06 6W
TT35800.06 6W

Luminus Led
6W ~550lm
CCT 2700K, 3000K, 4000K
Beam angle lens 16° 24° 34°
CRI>90
On/Off, 1-10V, Dali dim
Material:alminum frame
MOQ 50pcs
Internal Reference: 150mm PL38C40 PN42C70
Internal Reference: 400mm PL40C90 PN45C55
Internal Reference: 800mm PL43C60 PN48C50

TT55200.11 11W
TT55255.11 11W
TT55600.11 11W

Luminus Led
11W ~1120lm
CCT 2700K, 3000K, 4000K
Beam angle lens 15° 20° 29° 50°
CRI>90
On/Off, 1-10V, Dali dim
Material:alminum frame
MOQ 50pcs
Internal Reference: 200mm PL44C70 PN49C80
Internal Reference: 255mm PL46C50 PN51C70
Internal Reference: 600mm PL52C70 PN58C65

CCT



IP	CRI	Warranty
20	90	5 Years

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

MAGNETIC TRACK SUSPENDED LAMP DC48V [Ø35mm, Ø55mm] ACCESSORIES

Applications



VOLTAGE	IP	CRI
DC48V	20	90

• Accessories

Accessories Ø35mm

#35mm



Description
Spot



Description
Medium



Description
Flood



Description
Clear diffuser



Description
Soft diffuser



Description
Honeycomb

Accessories Ø55mm

#55mm



Description
Spot



Description
Medium



Description
Flood



Description
Wide Flood



Description
Clear diffuser



Description
Soft diffuser



Description
Honeycomb



Description
Spot



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



MAIN VOLTAGE TRACK AC220-240V or 110-127VAC

Applications



etc...

VOLTAGE	IP	CRI
MAINS	20	90

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk



• Three different sizes




The TUTTO track-mounted range is equipped with the latest in-track adapter technology which offers **Mains Voltage**, 48V low voltage and 48V magnet to choose. Five different sizes from a miniature 35mm 2watt up to 85mm 40watt. A powerful and interchangeable optical system is integrated into the same tube housing which produces various lighting distributions and beam shapes to suit different accent lighting demands. With seven standard lamp finishes and customized textures, DALI, Casambi, and phase-dimming smart control options, high quality light sources with CRI from Ra80 ~ Ra98, all these together to help architects and designers achieve almost endless possibilities.

• Easy Installation




• Different Tracks




• Customised Colour and Texture




Play with your light

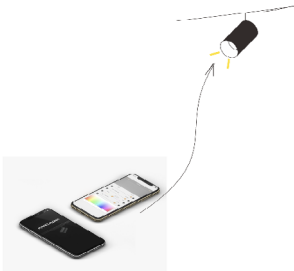

• Lighting Control

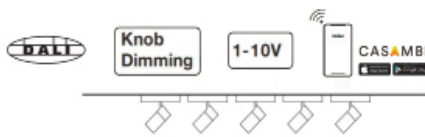

Application

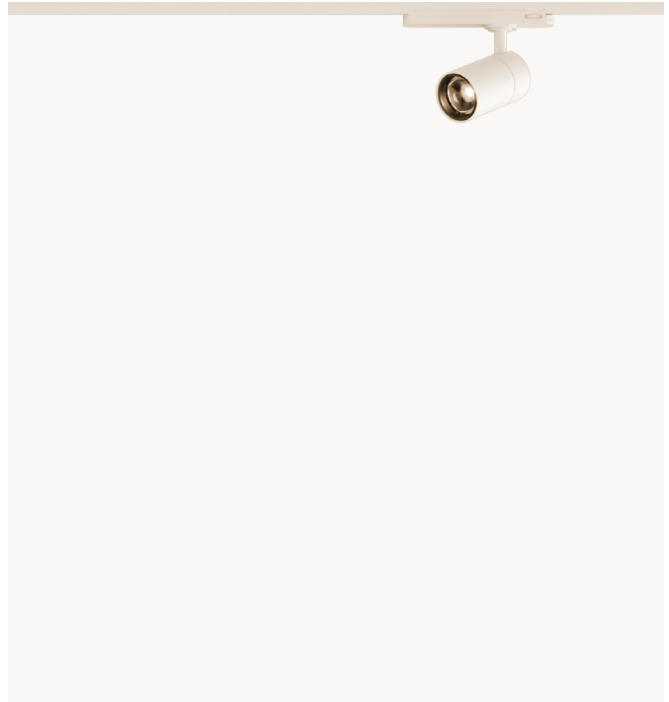

Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart TUTTO lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



TRACK SPOT LIGHT AC220-240V or 110-127VAC [Ø55mm, Ø70mm, Ø85mm]

Applications




etc...

VOLTAGE	IP	CRI
MAINS	20	90




DIAMETER 55mm



TT5595.15MV 15W

Luminus Led
15W ~1200lm
CCT 3000K, 4000K
Beam angle \odot lens 15° 20° 39° 50°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL32C95
PN36C75


DIAMETER 70mm



TT70118.20MV 20W

Luminus Led
20W ~1850lm
CCT 3000K, 4000K
Beam angle 16° 22° 34° 43°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL39C50
PN43C95


DIAMETER 70mm



TT70118.27MV 27W

Luminus Led
27W ~2650lm
CCT 3000K, 4000K
Beam angle 16° 22° 34° 43°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL40C70
PN45C25


DIAMETER 85mm



TT85132.27MV 27W

Luminus Led
27W ~2650lm
CCT 3000K, 4000K
Beam angle 21°, 26°, 36°, 45°, 34x62°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL45C10
PN50C25


DIAMETER 85mm



TT85132.35MV 35W

Luminus Led
35W ~3450lm
CCT 3000K, 4000K
Beam angle 21°, 26°, 36°, 45°, 34x62°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL47C80
PN53C20

DIAMETER 85mm



TT85132.45MV 45W

Luminus Led
45W ~3850lm
CCT 3000K, 4000K
Beam angle 21°, 26°, 36°, 45°, 34x62°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL47C80
PN53C20

MOQ 100 Uds

Finished color

- white
- black
- Grey

CCT



IP	CRI	Warranty
20	90	5 Years

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TUTTO SERIES

TRACK SPOT LIGHT AC220-240V or 110-127VAC [Ø55mm, Ø70mm, Ø85mm] ACCESSORIES

Applications




etc...

VOLTAGE	IP	CRI
MAINS	20	90

• Accessories


Accessories Ø55mm

Ø55mm

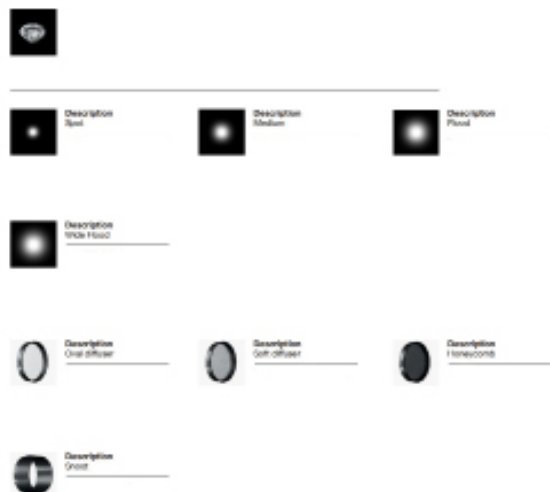


Accessories Ø70mm

Ø70mm

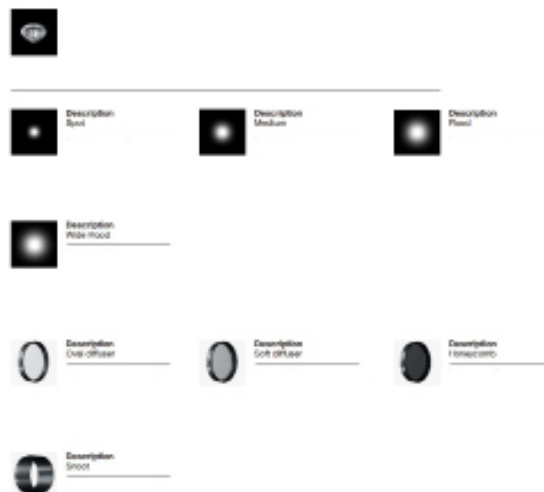

Accessories Ø85mm

Ø85mm

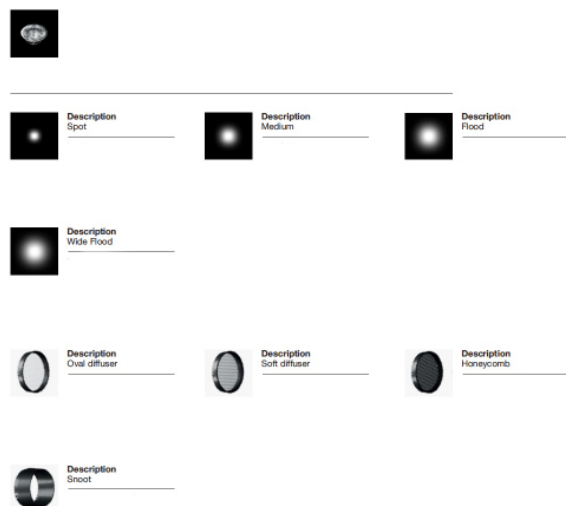

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



TUTTO SERIES

ZOOMABLE TRACK SPOT LIGHT AC220-240V or 110-127VAC [Ø55mm, Ø70mm, Ø85mm]

Applications




VOLTAGE	IP	CRI
MAINS	20	90



The TUTTO track-mounted range is equipped with the latest in-track adapter technology which offers **Mains Voltage**, 48V low voltage and 48V magnet to choose. Five different sizes from a miniature 35mm 2watt up to 85mm 40watt. A powerful and interchangeable optical system is integrated into the same tube housing which produces various lighting distributions and beam shapes to suit different accent lighting demands. With seven standard lamp finishes and customized textures, DALI, Casambi, and phase-dimming smart control options, high quality light sources with CRI from Ra80 ~ Ra98, all these together to help architects and designers achieve almost endless possibilities.

• Different Tracks

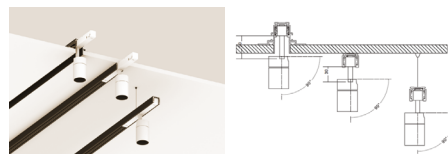

• Customised Colour and Texture




• Three different sizes




Play with your light



• Lighting Control

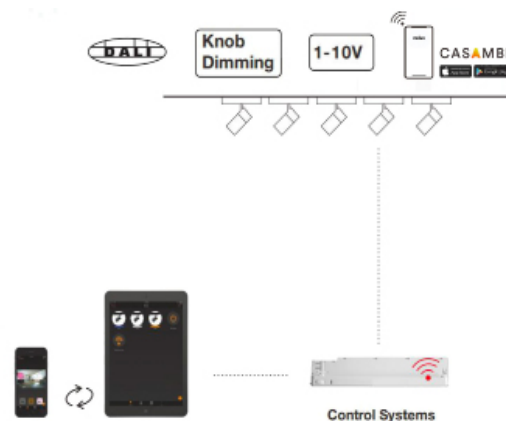

Application

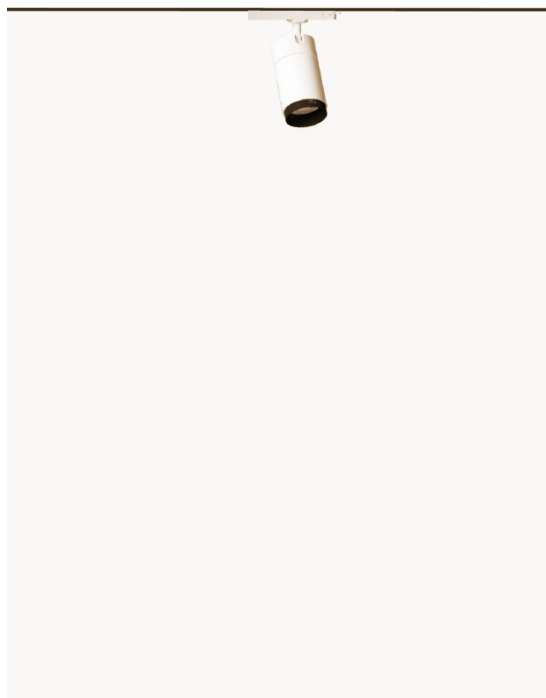

Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart TUTTO lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



ZOOMABLE TRACK SPOT LIGHT AC220-240V or 110-127VAC [Ø55mm, Ø70mm, Ø85mm]

Applications




etc...

VOLTAGE	IP	CRI
MAINS	20	90




DIAMETER 55mm



TT5595.15ZM 15W

Luminus Led
15W ~1200lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL40C58
PN45C10


DIAMETER 70mm



TT70118.20ZM 20W

Luminus Led
20W ~1720lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL47C95
PN53C45


DIAMETER 70mm



TT70118.27ZM 27W

Luminus Led
27W ~2650lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL48C50
PN53C95


DIAMETER 85mm



TT85132.27ZM 27W

Luminus Led
27W ~2650lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL54C55
PN60C75


DIAMETER 85mm



TT85132.35ZM 35W

Luminus Led
35W ~3450lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL55C10
PN61C35

DIAMETER 85mm



TT85132.40ZM 40W

Luminus Led
40W ~3850lm
CCT 3000K, 4000K
Zoomable 16° ~ 34°
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL55C10
PN61C35

MOQ 100 Uds

Finished color

- white
- black
- Grey

CCT



IP	CRI	Warranty
20	90	5 Years

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TUTTO SERIES

WALLWASHER & DOUBLE ASYMETRIC TRACK SPOT LIGHT AC220-240V / 110-127VAC [Ø55mm, Ø70mm, Ø85mm]

Applications



VOLTAGE	IP	CRI
MAINS	20	90






The TUTTO track-mounted range is equipped with the latest in-track adapter technology which offers **Mains Voltage Wall washer & Double Asymmetric**, 48V low voltage and 48V magnet to choose. Five different sizes from a miniature 35mm 2watt up to 85mm 40watt. A powerful and interchangeable optical system is integrated into the same tube housing which produces various lighting distributions and beam shapes to suit different accent lighting demands. With seven standard lamp finishes and customized textures, DALI, Casambi, and phase-dimming smart control options, high quality light sources with CRI from Ra80 ~ Ra98, all these together to help architects and designers achieve almost endless possibilities.

• Wall washer



• Double asymmetric




• Customised Colour and Texture




• Three different sizes




• Different Tracks

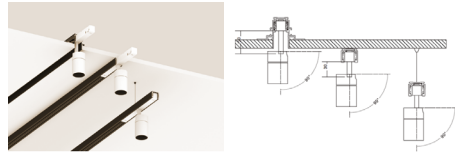

Play with your light

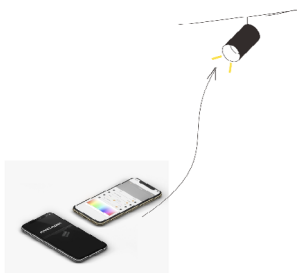

• Lighting Control

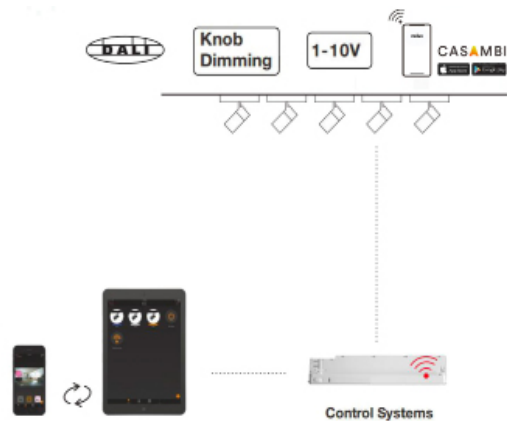

Application



Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart TUTTO lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



TUTTO SERIES

WALLWASHER & DOUBLE ASYMETRIC TRACK SPOT LIGHT AC220-240V / 110-127VAC [Ø55mm, Ø70mm, Ø85mm]


Applications



VOLTAGE	IP	CRI
MAINS	20	90




DIAMETER 55mm





TT5595.15WW 15W
Luminus Led
15W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL43C55
PN48C45

DIAMETER 70mm




TT70118.20WW 20W
Luminus Led
20W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL52C79
PN58C85

• Wall washer • Double asymmetric

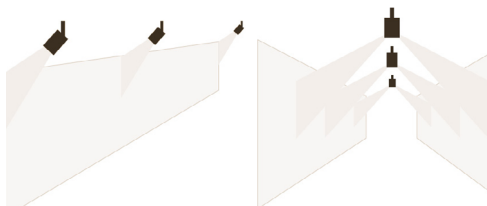


DIAMETER 70mm




TT70118.27WW 27W
Luminus Led
27W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL52C79
PN58C75

DIAMETER 85mm




TT85132.35WW 35W
Luminus Led
35W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL58C95
PN65C65

DIAMETER 85mm



TT85132.40WW 40W
Luminus Led
40W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL58C95
PN65C65

DIAMETER 85mm



TT85132.27WW 27W
Luminus Led
27W
CCT 3000K, 4000K
Wall washer or Double Asymmetric
CRI>90
Driver Osram
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL56C80
PN63C20

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 100 Uds

Finished color



PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TRACK SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm]


Applications



etc...

VOLTAGE	IP	CRI
MAINS	20	90


TUBE LENGTH 200mm,255mm,600mm

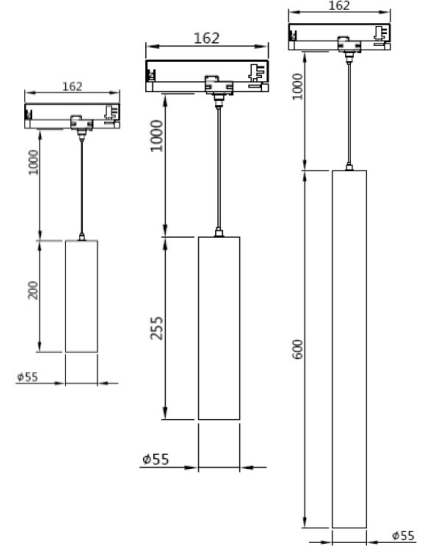

TT55200MV.11 13W
TT55255MV.11 13W
TT55600MV.11 13W

Luminus Led
11W ~1120lm
CCT 2700K, 3000K, 4000K
Beam angle lens 15° 20° 29° 50°
CRI>90
On/Off, 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 200mm PL44C70 PN49C75
Internal Reference: 255mm PL46C50 PN51C85
Internal Reference: 600mm PL52C70 PN58C90

TUBE LENGTH 150mm,400mm,800mm

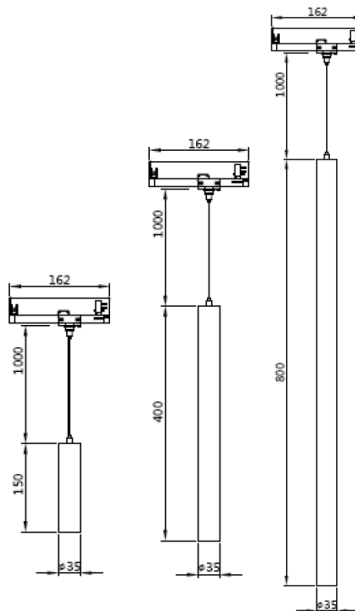

TT35150MV.06 6W
TT35400MV.06 6W
TT35800MV.06 6W

Luminus Led
6W ~550lm
CCT 2700K, 3000K, 4000K
Beam angle lens 16° 24° 34°
CRI>90
On/Off, 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 150mm PL38C40 PN42C70
Internal Reference: 400mm PL40C90 PN45C55
Internal Reference: 800mm PL43C60 PN48C50

CCT



IP	CRI	Warranty
20	90	5 Years

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

TRACK SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm]

Applications



VOLTAGE	IP	CRI
MAINS	20	90

• Accessories

ø35mm



Description
Spot



Description
Medium



Description
Flood



Description
Oval diffuser



Description
Soft diffuser



Description
Honeycomb

Accessories Ø 55mm

ø55mm



Description
Spot



Description
Medium



Description
Flood



Description
Wide Flood



Description
Oval diffuser



Description
Soft diffuser



Description
Honeycomb



www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



RECESSED SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm, Ø85mm]

Applications




etc...

VOLTAGE	IP	CRI
MAINS	20	90




TUBE LENGTH 150mm,400mm,800mm

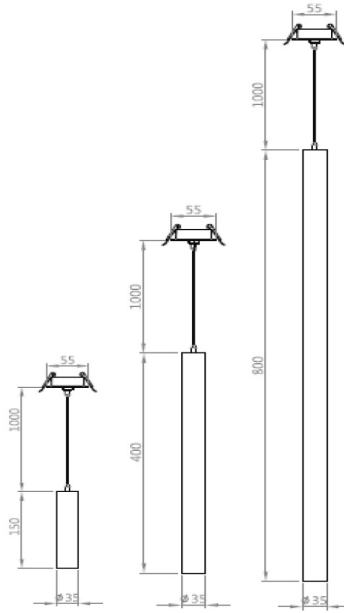

TT35150RP.08 8W
TT35400RP.08 8W
TT35800RP.08 8W

Luminus Led
8W ~680lm
CCT 2700K, 3000K, 4000K
Beam angle lens 16° 24° 34°
CRI>90
On/Off, Optional 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 150mm PL29C80 PN33C35
Internal Reference: 400mm PL32C90 PN36C65
Internal Reference: 800mm PL35C85 PN39C85


TUBE LENGTH 200mm,255mm,600mm

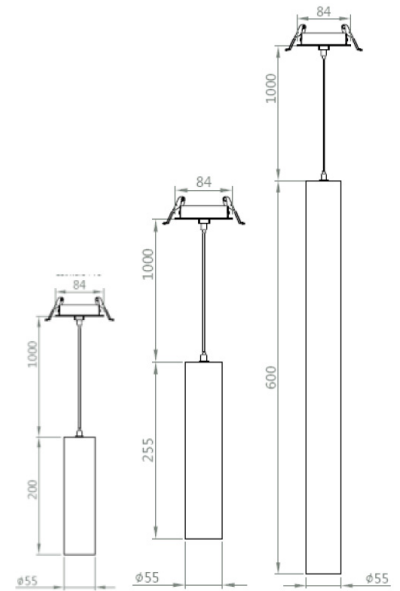

TT55200RP.15 15W
TT55255RP.15 15W
TT55600RP.15 15W

Luminus Led
15W ~1120lm
CCT 2700K, 3000K, 4000K
Beam angle lens 15° 20° 39° 50°
CRI>90
On/Off, Optional 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 200mm PL37C10 PN41C25
Internal Reference: 255mm PL38C90 PN43C45
Internal Reference: 600mm PL44C65 PN49C75

TUBE LENGTH 255mm,365mm

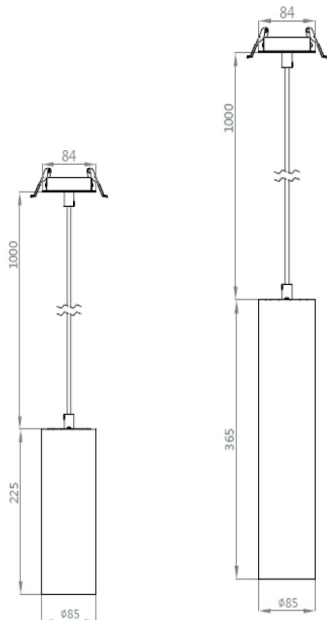

TT85225RP.37 37W
TT85365RP.37 37W

Luminus Led
37W ~3360lm
CCT 2700K, 3000K, 4000K
Beam angle lens 21° 26° 36° 45°
CRI>90
On/Off, Optional 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 225mm PL55C80 PN62C10
Internal Reference: 365mm PL59C90 PN66C60

CCT



IP	CRI	Warranty
20	90	5 Years

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

RECESSED SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm, Ø85mm]

Applications



etc...

VOLTAGE	IP	CRI
MAINS	20	90

• Accessories

Accessories Ø 35mm

Ø35mm



Description Spot



Description Medium



Description Flood



Description Oval diffuser



Description Soft diffuser



Description Honeycomb

Accessories Ø 55mm

Ø55mm



Description Spot



Description Medium



Description Flood



Description Wide Flood



Description Oval diffuser



Description Soft diffuser



Description Honeycomb



Description Spot

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



RECESSED SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm]

Applications




etc...

VOLTAGE	IP	CRI
MAINS	20	90




TUBE LENGTH 150mm,400mm,800mm

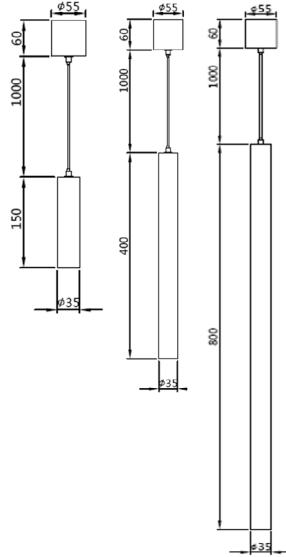

TT35150SP.06 6W
TT35400SP.06 6W
TT35800SP.06 6W

Luminus Led
6W ~550lm
CCT 2700K, 3000K, 4000K
Beam angle lens 16° 24° 34°
CRI>90
On/Off, Optional 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 150mm PL29C80 PN33C20
Internal Reference: 400mm PL33C90 PN37C80
Internal Reference: 800mm PL36C85 PN40C95

TUBE LENGTH 200mm,255MM,600mm

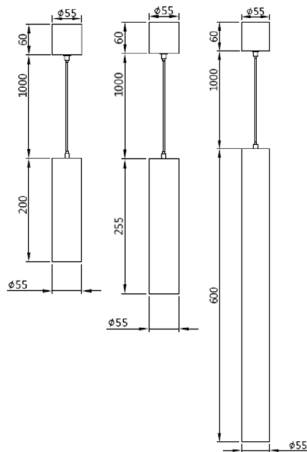

TT85200SP.15 15W
TT85255SP.15 15W
TT85600SP.15 15W

Luminus Led
15W ~1120lm
CCT 2700K, 3000K, 4000K
Beam angle lens 15° 20° 39° 50°
CRI>90
On/Off, Optional 1-10V, Dali dim
Material:aluminum frame
MOQ 50pcs
Internal Reference: 200mm PL39C80 PN44C25
Internal Reference: 255mm PL41C70 PN46C45
Internal Reference: 600mm PL45C85 PN50C95

CCT



IP	CRI	Warranty
20	90	5 Years

Finished color



PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

RECESSED SUSPENDED LAMP AC220-240V or 110-127VAC [Ø35mm, Ø55mm]

Applications



VOLTAGE	IP	CRI
MAINS	20	90

• Accessories

Accessories Ø 35mm

Ø35mm



Description
Spot



Description
Medium



Description
Flood



Description
Oval diffuser



Description
Soft diffuser



Description
Honeycomb

Accessories Ø 55mm

Ø55mm



Description
Spot



Description
Medium



Description
Flood



Description
Wide Flood



Description
Oval diffuser



Description
Soft diffuser



Description
Honeycomb



Description
Spot

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk



RECESSED SPOT LIGHT AC220-240V or 110-127VAC [Ø35mm, Ø45mm, Ø55mm, Ø70mm, Ø85mm]


Applications




VOLTAGE	IP	CRI
MAINS	20	90




DIAMETER 35mm




TT3560.06 6W
Luminus Led
6W ~550lm
350° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 16°,24°,34°
CRI>90
Driver Osram, Khün
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL28C20 PN31C35
DIAMETER 55mm



DIAMETER 45mm




TT4575.11 11W
Luminus Led
11W ~490lm
350° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 14°,20°,32°,56°
CRI>90
Driver Osram, Khün
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL28C85 PN32C10
DIAMETER 70mm



TT5595.15 15W
Luminus Led
15W ~1120lm
350° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 15°,20°,39°,50°
CRI>90
Driver Osram, Khün
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL35C15 PN39C10

TT701118.28 28W
Luminus Led
28W ~2030lm
350° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 16°,22°,34°,43°
CRI>90
Driver Osram, Khün
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL42C90 PN47C75
DIAMETER 85mm



• Five models



TT85132.40 40W
Luminus Led
40W ~3360lm
350° rotatable,90° tiltable
CCT 2700K,3000K, 4000K
Beam angle 21°,26°,36°,45°
CRI>90
Driver Osram, Khün
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL50C60 PN56C55

CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 50 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly


RECESSED SPOT LIGHT [Ø35mm, Ø45mm, Ø55mm, Ø70mm, Ø85mm] ACCESSORIES

Applications




VOLTAGE	IP	CRI
MAINS	20	90


Accessories Ø 35mm
ø35mm

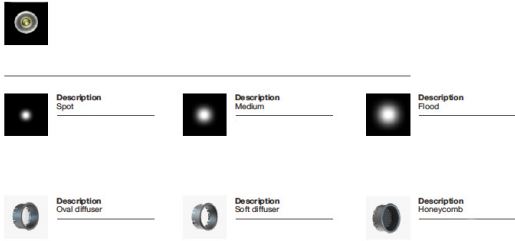


Accessories Ø 55mm
ø55mm

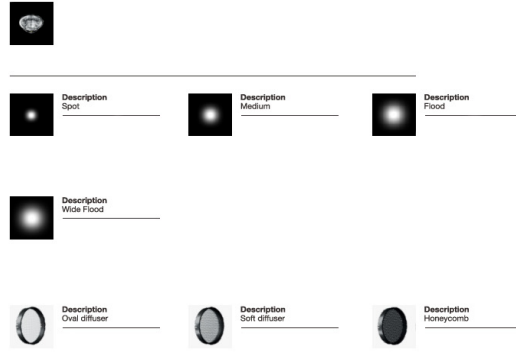


Accessories Ø 45mm
ø45mm

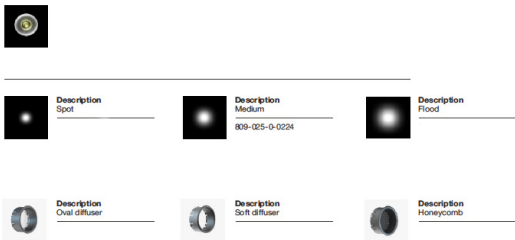

Accessories Ø 70mm
ø70mm

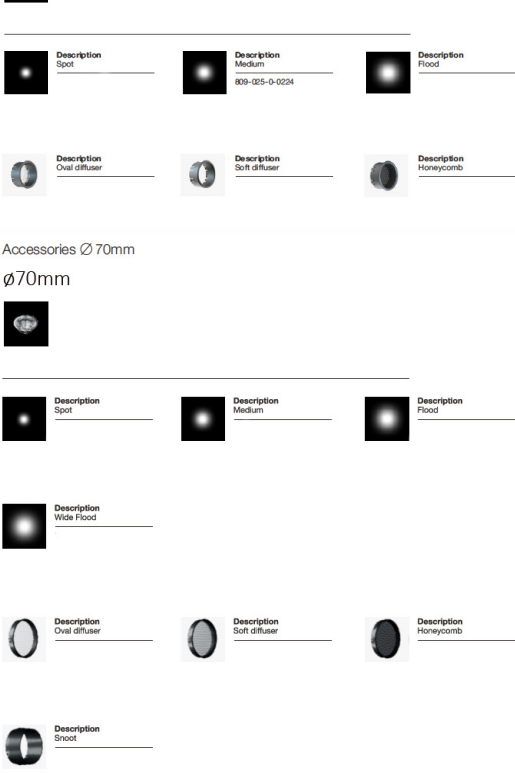

Accessories Ø 85mm
ø85mm

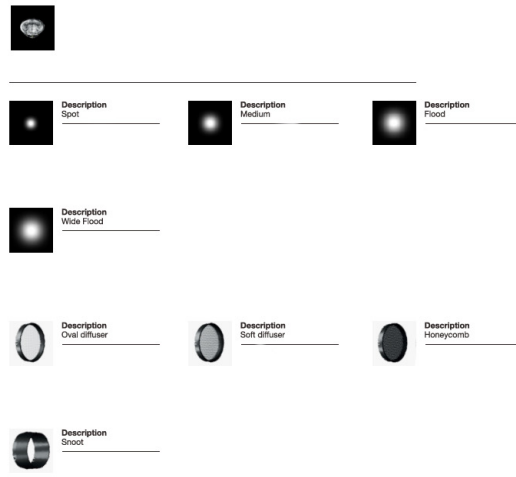

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

MOQ 50 Uds

Finished color

white	
black	
Grey	

CCT



IP	CRI	Warranty
20	90	5 Years

PHOTOMETRIC CURVE CONTACT US Nelux provide you shortly

www.nelux.com.hk

SURFACE SPOT LIGHT AC220-240V or 110-127VAC [Ø55mm, Ø70mm, Ø85mm]


Applications



VOLTAGE	IP	CRI
MAINS	20	90




DIAMETER 55mm




TT5595S.15 15W
Luminus Led
15W ~1120lm
350° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 15°, 20°, 39°, 50°
CRI>90
Driver Osram, Khün
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL34C80 PN38C70

DIAMETER 70mm



TT701118S.24 24W
Luminus Led
24W ~2030lm
350° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 16°, 22°, 34°, 43°
CRI>90
Driver Osram, Khün
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL44C70 PN49C75

DIAMETER 85mm



TT85132S.32 32W
Luminus Led
32W ~3360lm
350° rotatable, 90° tiltable
CCT 2700K, 3000K, 4000K
Beam angle 21°, 26°, 36°, 45°
CRI>90
Driver Osram, Khün
Material: aluminum frame
MOQ 50pcs
Internal Reference: PL51C30 PN57C10



• Three models



CCT



IP	CRI	Warranty
20	90	5 Years

MOQ 50 Uds

Finished color

white	
black	
Grey	

PHOTOMETRIC CURVE CONTACT US Nelux provide you shortly

SURFACE SPOT LIGHT [Ø55mm, Ø70mm, Ø85mm] ACCESSORIES

Applications



VOLTAGE	IP	CRI
MAINS	20	90

Accessories Ø55mm

Ø55mm



Description Spot



Description Medium



Description Flood



Description Wide Flood



Description Oval diffuser



Description Soft diffuser



Description Honeycomb



Description Snoot

Accessories Ø70mm

Ø70mm



Description Spot



Description Medium



Description Flood



Description Wide Flood



Description Oval diffuser



Description Soft diffuser



Description Honeycomb



Description Snoot

Accessories Ø85mm

Ø85mm



Description Spot



Description Medium



Description Flood



Description Wide Flood



Description Oval diffuser



Description Soft diffuser



Description Honeycomb



Description Snoot



CCT

2700K

3000K

4000K

IP

20

CRI

90

Warranty

5 Years

MOQ 50 Uds

Finished color

white

black

Grey

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

RECESSED DOWNLIGHT LIGHT AC220-240V or 110-127VAC [Ø50mm, Ø60mm, Ø75mm, Ø105mm, Ø125mm]


Applications




VOLTAGE	IP	CRI
MAINS	20	90



CUT OUT 50mm




CUT OUT 60mm




TTRD50.6 6W
Luminus Led
6W
CCT 2700K,3000K, 4000K
Beam angle 21°,26°,36°,45°
350° rotatable, 30° tiltable
CRI>90
Driver Osram
DiM On-off/Triac/1-10V/DALI
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL22C95
PN25C55

TTRD60.8 8W
Luminus Led
8W
CCT 2700K,3000K, 4000K
Beam angle 14°,20°,32°,56°
350° rotatable, 30° tiltable
CRI>90
Driver Osram
DiM On-off/Triac/1-10V/DALI
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL24C20
PN26C95


CUT OUT 75mm



CUT OUT 105mm



CUT OUT 125mm



TTRD75.15 15W
Luminus Led
15W
CCT 2700K,3000K, 4000K
Beam angle 15°,20°,39°,50°
350° rotatable, 30° tiltable
CRI>90
Driver Osram
DiM On-off/Triac/1-10V/DALI
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL27C60
PN30C75

TTRD105.24 24W
Luminus Led
24W
CCT 2700K,3000K, 4000K
Beam angle 16°,22°,34°,43°
350° rotatable, 30° tiltable
CRI>90
Driver Osram
DiM On-off/Triac/1-10V/DALI
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL37C50
PN41C80

TTRD125.34 34W
Luminus Led
34W
CCT 2700K,3000K, 4000K
Beam angle 21°,26°,36°,45°
350° rotatable, 30° tiltable
CRI>90
Driver Osram
DiM On-off/Triac/1-10V/DALI
Material:aluminum frame
MOQ 50pcs
Internal Reference: PL51C90
PN57C75



www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk

MOQ 100 Uds

Finished color

white	
black	
Grey	

CCT

2700K	3000K	4000K

IP	CRI	Warranty
20	90	5 Years

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly
www.nelux.com.hk

CEILING & WALL DIRECT-INDIRECT LIGHT AC200-240V, AC100-240V, AC100-277V

Applications



SDCM	UGR
SDCM<3	<19

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -


sales@nelux.com.hk



Color can be customised




SIZE 585mm



TF58586.40 40W
TF58586.60 60W

Samsung/EDISON/OSRAM/
Led SDCM<3
30W or 40W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 40: PL86C20 PN95C80
Inter.Ref On/Off 60: PL89C95 PN99C95



SIZE 735mm



TF73586.50 50W
TF73586.70 70W

Samsung/EDISON/OSRAM/
Led SDCM<3
50W or 70W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 50: PL130C50 PN145C00
Inter.Ref On/Off 70: PL133 PN148C10


SIZE 300mm



TF30086.15 15W
TF30086.25 25W

Samsung/EDISON/OSRAM/
Led SDCM<3
15W or 25W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 15: PL42C95 PN47C85
Inter.Ref On/Off 25: PL44C50 PN49C75


SIZE 435mm



TF43586.30 30W
TF43586.40 40W

Samsung/EDISON/OSRAM/
Led SDCM<3
30W or 40W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 30: PL61C95 PN68C90
Inter.Ref On/Off 40: PL62C65 PN69C75


SIZE 875mm



TF87586.70 70W
TF87586.90 90W

Samsung/EDISON/OSRAM/
Led SDCM<3
50W or 70W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 70: PL180C50 PN200C60
Inter.Ref On/Off 90: PL184C10 PN205C60

SIZE 1150mm



TF115086.90 90W
TF115086.120 120W

Samsung/EDISON/OSRAM/
Led SDCM<3
50W or 70W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 90: PL330C50 PN367C70
Inter.Ref On/Off 120: PL335C10 PN372C55

TAFILO Ceiling & Wall light series adopts simple and clean concept, low UGR, offering the most comfortable lighting environment, Up and down light could help make the lighting environment look more spacious. Product's advantages: uniform liminescence, no spots.

This item has four intallation ways: surface , wall , suspended and suspended rod .
Application: lobby,hotel, office etc.



CCT



IP	Warranty
20	5 Years

MOQ 10 Uds

Finished color

white	
black	
Silver	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

TAFILO SERIES

SUSPENDED LAMP DIRECT-INDIRECT LIGHT AC200-240V, AC100-240V, AC100-277V

Applications



SDCM	UGR
SDCM<3	<19

www.nelux.com.hk

Chez nelux chaque produit est un bijou

sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -


sales@nelux.com.hk



Color can be customised




SIZE 585mm



TF58586SM.40 40W
TF58586SM.60 60W

Samsung/EDISON/OSRAM/
Led SDCM<3
40W or 60W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 40: PL101C20 PN112C55
Inter.Ref On/Off 60: PL104C95 PN116C75


SIZE 735mm



TF73586SM.50 50W
TF73586SM.70 70W

Samsung/EDISON/OSRAM/
Led SDCM<3
50W or 70W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 50: PL145C50 PN161C80
Inter.Ref On/Off 70: PL148 PN165C75


SIZE 300mm



TF30086SM.15 15W
TF30086SM.25 25W

Samsung/EDISON/OSRAM/
Led SDCM<3
15W or 25W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 15: PL57C95 PN64C55
Inter.Ref On/Off 25: PL59C50 PN66C20


SIZE 435mm



TF43586SM.30 30W
TF43586SM.40 40W

Samsung/EDISON/OSRAM/
Led SDCM<3
30W or 40W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 30: PL76C95 PN85C65
Inter.Ref On/Off 40: PL77C65 PN86C45


SIZE 875mm



TF87586SM.70 70W
TF87586SM.90 90W

Samsung/EDISON/OSRAM/
Led SDCM<3
70W or 90W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 70: PL195C50 PN217C25
Inter.Ref On/Off 90: PL199C10 PN222C25

SIZE 1150mm




TF115086SM.90 90W
TF115086SM.120 120W

Samsung/EDISON/OSRAM/
Led SDCM<3
90W or 120W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 70: PL340C50 PN378C45
Inter.Ref On/Off 90: PL345C10 PN383C65

TAFILO Ceiling & Wall light series adopt simple and clean concept, low UGR, offering the most comfortable lighting environment, Up and down light could help make the lighting environment look more spacious. Product's advantages: uniform luminance, no spots.

This item has four installation ways: **surface, wall, suspended and suspended rod.**
Application: lobby, hotel, office etc.

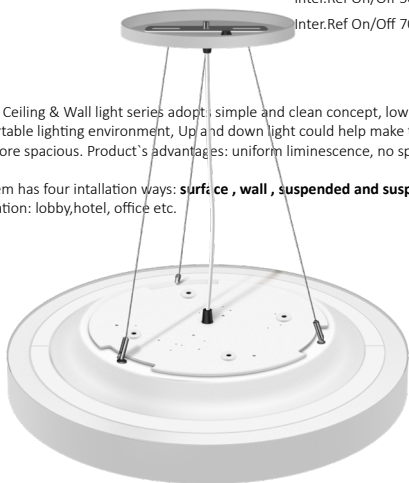

CCT



IP	Warranty
20	5 Years

MOQ 10 Uds

Finished color	
white	
black	
Silver	

PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

ROD LAMP DIRECT-INDIRECT LIGHT AC200-240V, AC100-240V,AC100-277V

Applications




SDCM	UGR
SDCM<3	<19



Color can be customised




SIZE 585mm




TF58586R.40 40W
TF58586R.60 60W
Samsung/EDISON/OSRAM/
Led SDCM<3
40W or 60W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 40: PL96C20 PN106C90
Inter.Ref On/Off 60: PL99C95 PN111C20

SIZE 735mm




TF73586R.50 50W
TF73586R.70 70W
Samsung/EDISON/OSRAM/
Led SDCM<3
50W or 70W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 50: PL140C50 PN156C35
Inter.Ref On/Off 70: PL143 PN158C90

SIZE 300mm




TF30086R.15 15W
TF30086R.25 25W
Samsung/EDISON/OSRAM/
Led SDCM<3
15W or 25W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 15: PL52C95 PN58C95
Inter.Ref On/Off 25: PL54C50 PN60C75

SIZE 435mm




TF43586R.30 30W
TF43586R.40 40W
Samsung/EDISON/OSRAM/
Led SDCM<3
30W or 40W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 30: PL71C95 PN79C95
Inter.Ref On/Off 40: PL72C65 PN80C85

SIZE 875mm



TF87586R.70 70W
TF87586R.90 90W
Samsung/EDISON/OSRAM/
Led SDCM<3
70W or 90W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 70: PL190C50 PN212C70
Inter.Ref On/Off 90: PL194C10 PN215C80


SIZE 1150mm



TF115086R.90 90W
TF115086R.120 120W
Samsung/EDISON/OSRAM/
Led SDCM<3
90W or 120W 120lm/W
CCT 2700K-6500K
Beam angle 120°
PF>0.90
PS Cover opal
Microprismatic UGR<19
CRI>80, CRI>90
Driver Khun,Boke,Osram
On-off/1-10V/DALI Tunable white DT 8
Material:aluminum frame
MOQ 10pcs
Main color White, Black, Silver
Life Time L90/50,000h
Inter.Ref On/Off 70: PL345C50 PN383C90
Inter.Ref On/Off 90: PL350C10 PN390C10

TAFILO Ceiling & Wall light series adopts simple and clean concept, low UGR, offering the most comfortable lighting environment, Up and down light could help make the lighting environment look more spacious. Product's advantages: uniform luminescence, no spots.

This item has four installation ways: **surface** , **wall** , **suspended** and **suspended rod** .
Application: lobby,hotel, office etc.

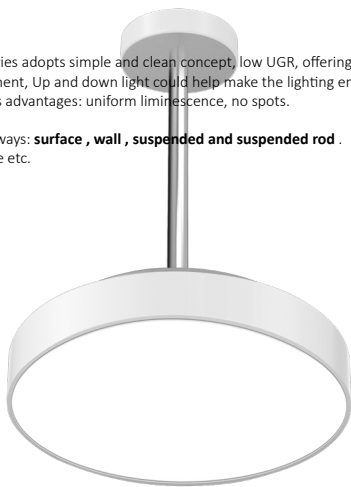

CCT








IP	Warranty
20	5 Years

MOQ 10 Uds

Finished color	
white	
black	
Silver	





PHOTOMETRIC CURVE
Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

-  Solicite nuestros catálogos
-  Request our new catalogs
-  Demandez nos catalogues
-  Solicite nossos catálogos
-  Richiedi i nostri cataloghi

NELUX ARCHITECTURAL LIGHTING PRODUCTS

Magnetic Track
Light Profiles: Linear Light Profiles, Circular Light Profiles
Wall Bed Light
Multi-dot Luminaires
Wall Washer Hotel Spot Lights



Chez nelux chaque produit est un bijou

NELUX GROUP

Led Strips
Portable Lamp
Outdoor Lighting

Outdoor Lighting



sales@nelux.com.hk

www.nelux.com.hk

nelux architectural lighting products - producing quality -

sales@nelux.com.hk



Nelux HK international, Ltd., which is established in 2010 by European-Asian shareholders has been focusing on the researching, designing, molds and production of the top level commercial lighting products. Customised Lighting Products

More architectural lighting products.....

www.nelux.com.hk

Outdoor lighting products.....

www.solucionled.com

Address Head Office

18 harbour road, central plaza
32/F 3208 office, wanchai, HK

Address Assembling Workshop

22 Kin Fat St. 11th Floor, Sun Hing Industrial Building,
Tuen Mun, Hong Kong, China

NELUX group

www.nelux.com.hk
www.solucionled.com

Contact Call +852 28600042
Email sales@nelux.com.hk
Email salesnelux@gmail.com
Skype. neluxlighting
Wechat neluxury

PHOTOMETRIC CURVE

Please contact us sales@nelux.com.hk Nelux provide you shortly

www.nelux.com.hk

Page 71

