

NELUX ARCHITECTURAL LIGHTING PRODUCTS



MAGNETIC SYSTEM CATALOG **K05**

MINI **K05** ONLY **5mm**

K05 MAGNET SYSTEM

2 0 2 3

NELUX

MINI K05 ONLY 5mm





NELUX


MINI 605 ONLY 5mm




KRT Track (Flush mounting)

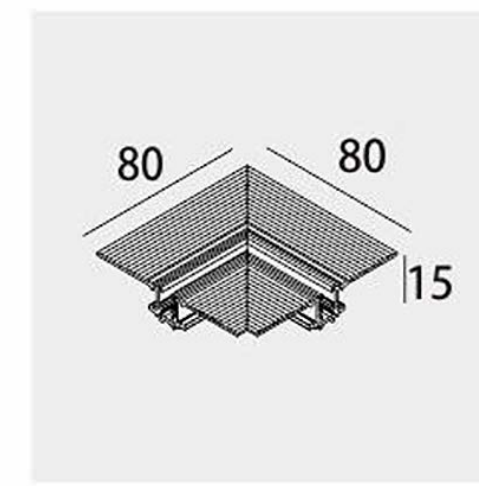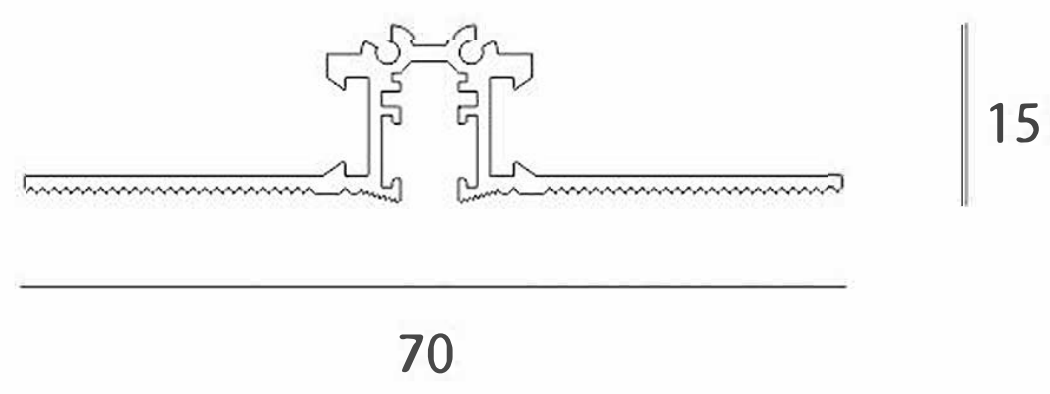

KRT-L01

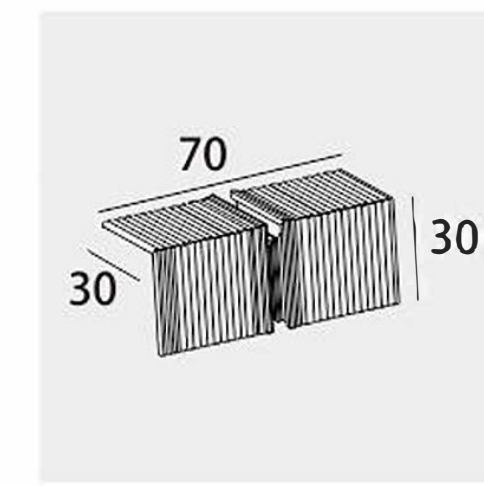


KRT-J01

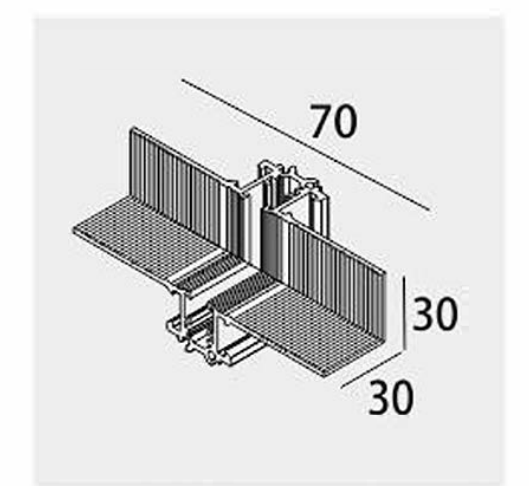


KRT-J02


Type	Electrical parameters	Maximum current	Length(mm)
KRT-0.5M	DC 24V	4A max	500
KRT-1M	DC 24V	4A max	1000
KRT-2M	DC 24V	4A max	2000
KRT-3M	DC 24V	4A max	3000

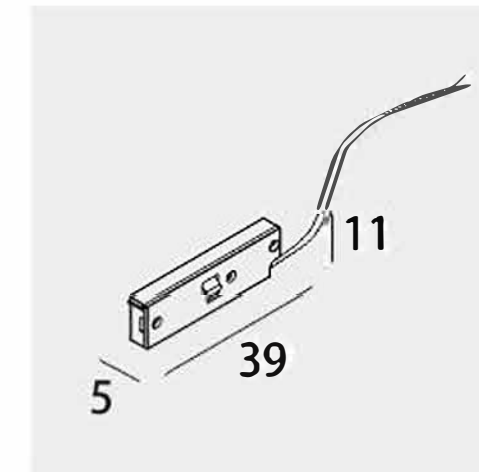

KRT-E01

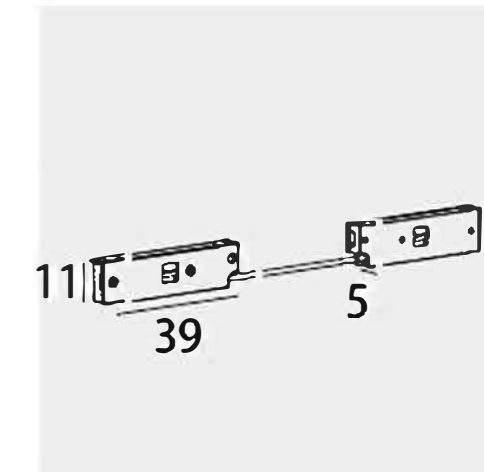

KRT-E02


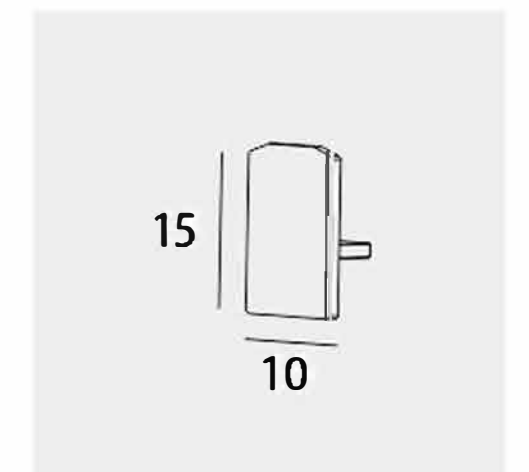


KRT-END




KRT-C01

KDT Track (CLAMP PLATE)

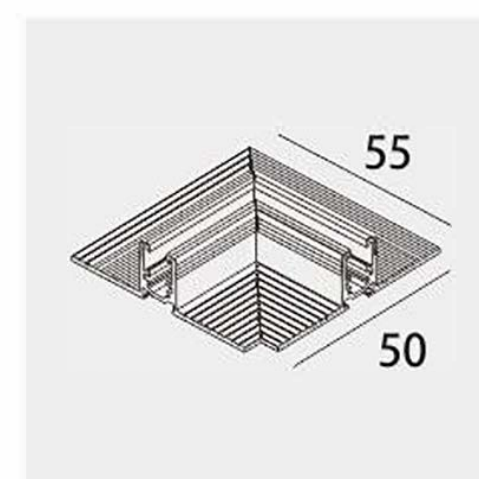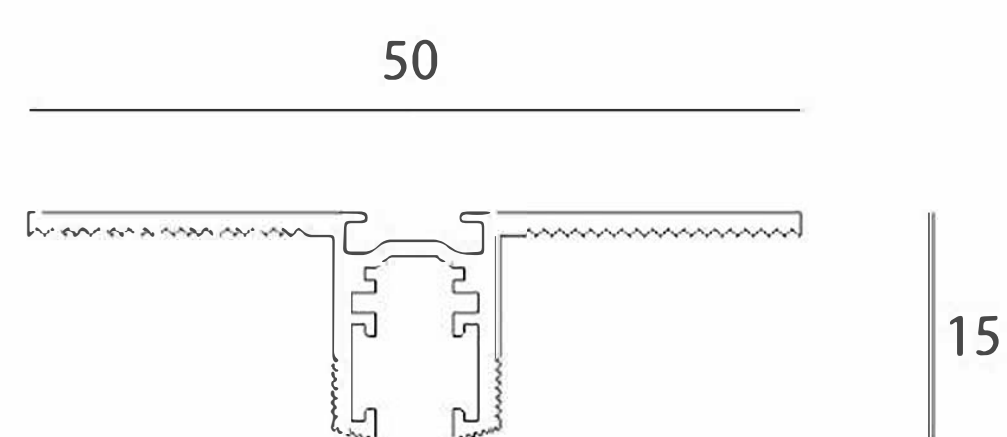

KDT-L02


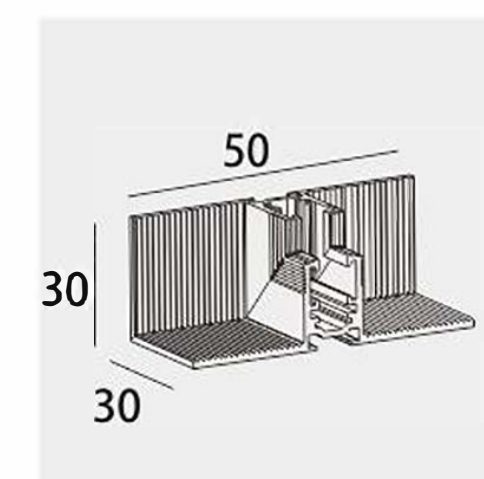


KDT-J02


Type	Electrical parameters	Maximum current	Length(mm)
KDT-0.5M	DC 24V	4A max	500
KDT-1M	DC 24V	4A max	1000
KDT-2M	DC 24V	4A max	2000
KDT-3M	DC 24V	4A max	3000



KST Track (Surface mounting)

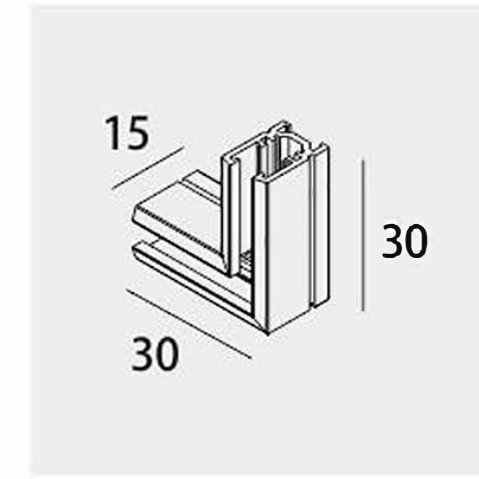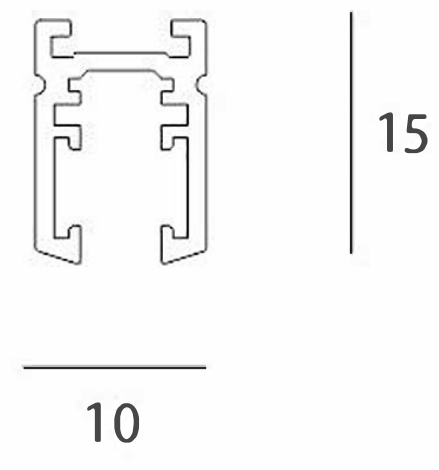

KST-L02

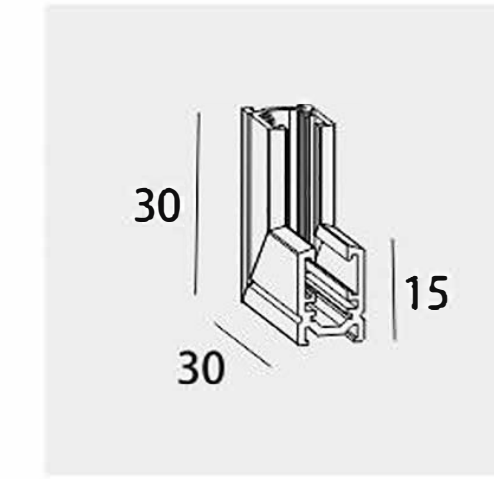


KST-J02





KST-C01

Type	Electrical parameters	Maximum current	Length(mm)
KST-0.5M	DC 24V	4A max	500
KST-1M	DC 24V	4A max	1000
KST-2M	DC 24V	4A max	2000
KST-3M	DC 24V	4A max	3000

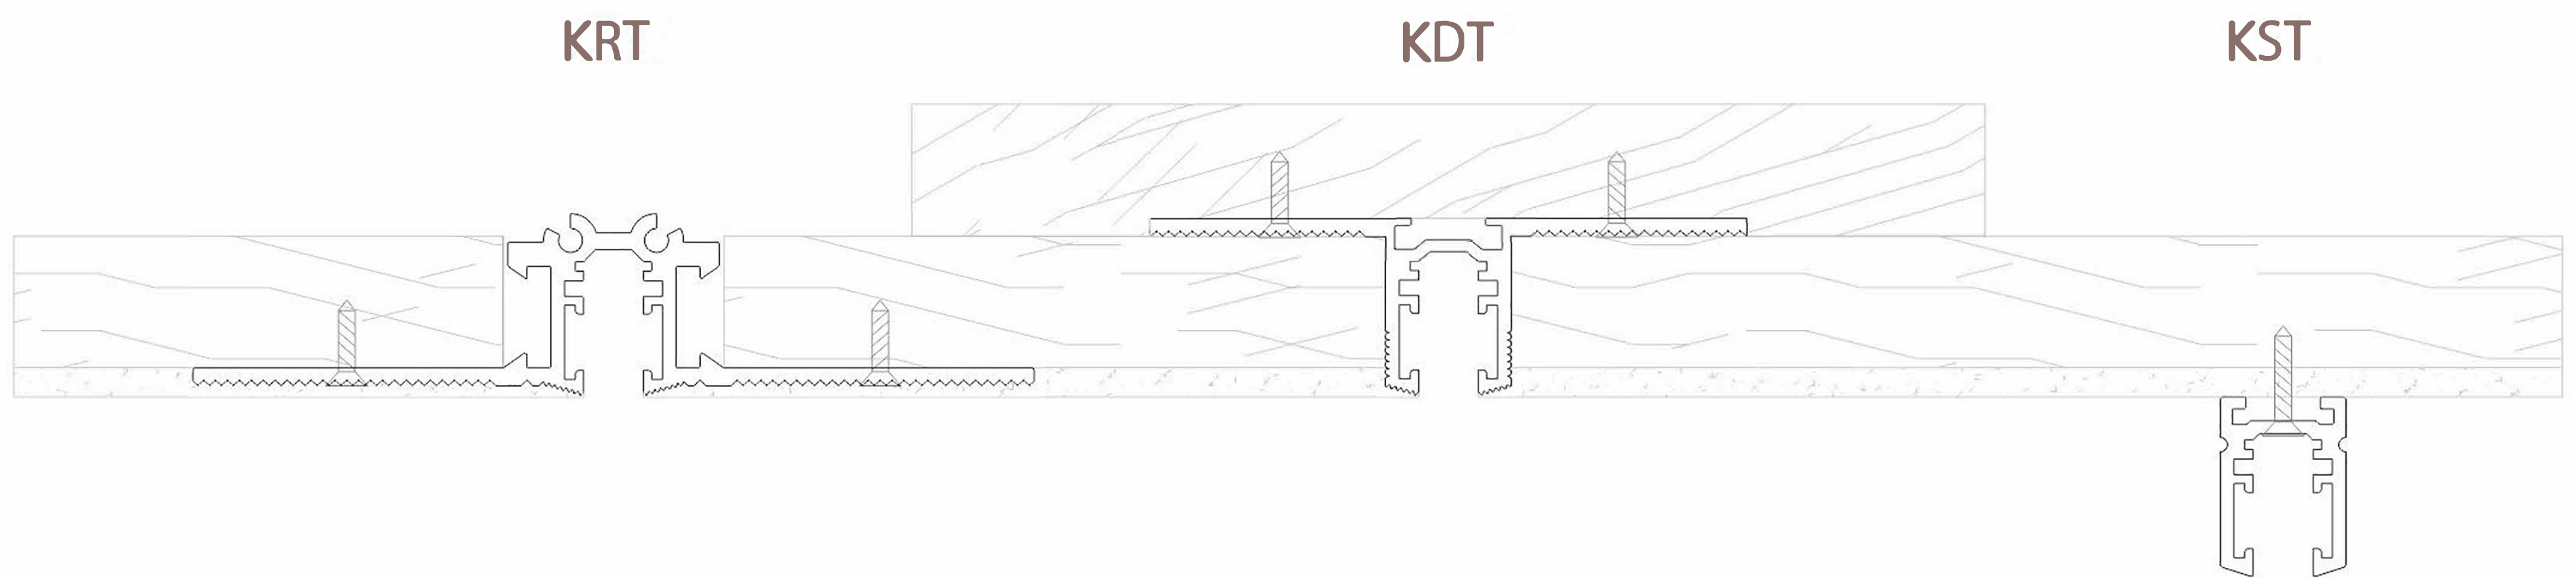



KSA0525DR

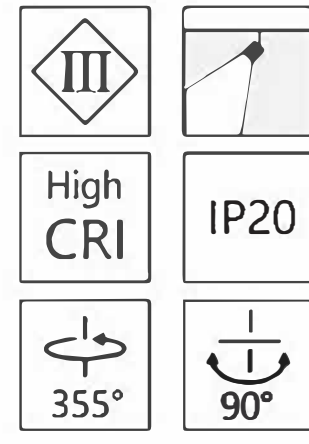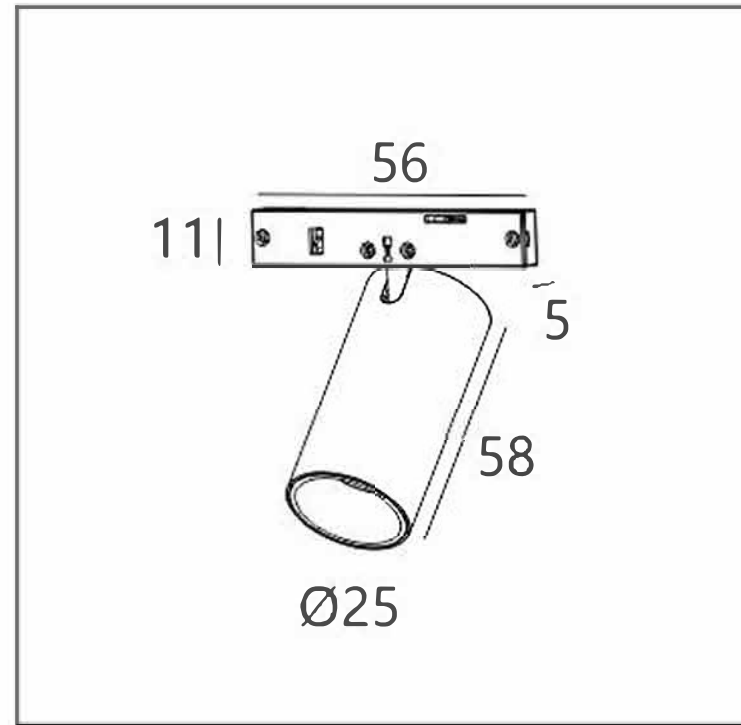

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KSA0535DR

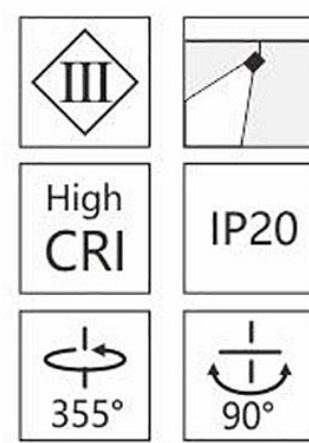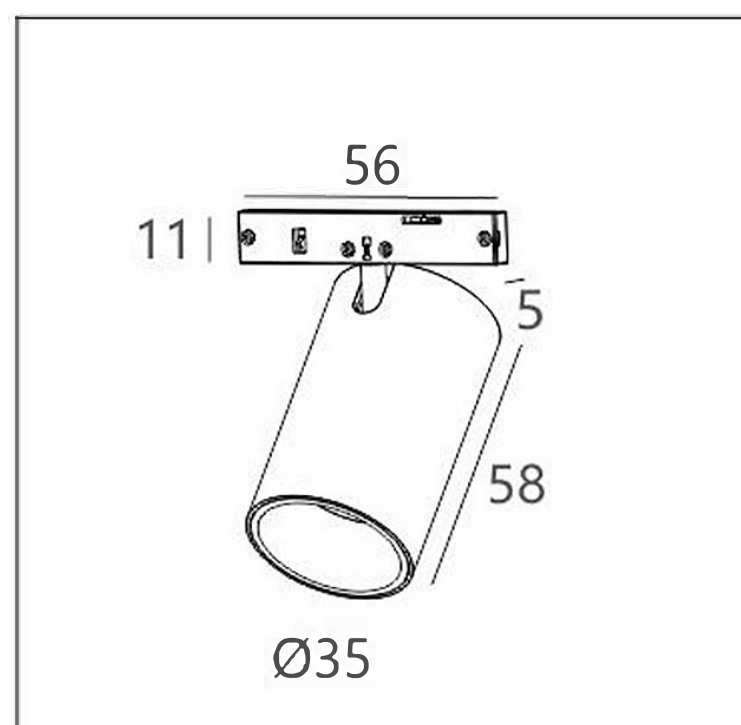

LightSource:
COB

Luminousflux:
500lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KSA0545DR

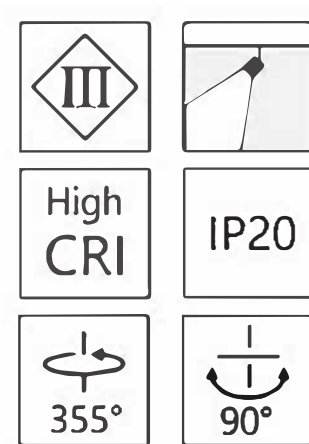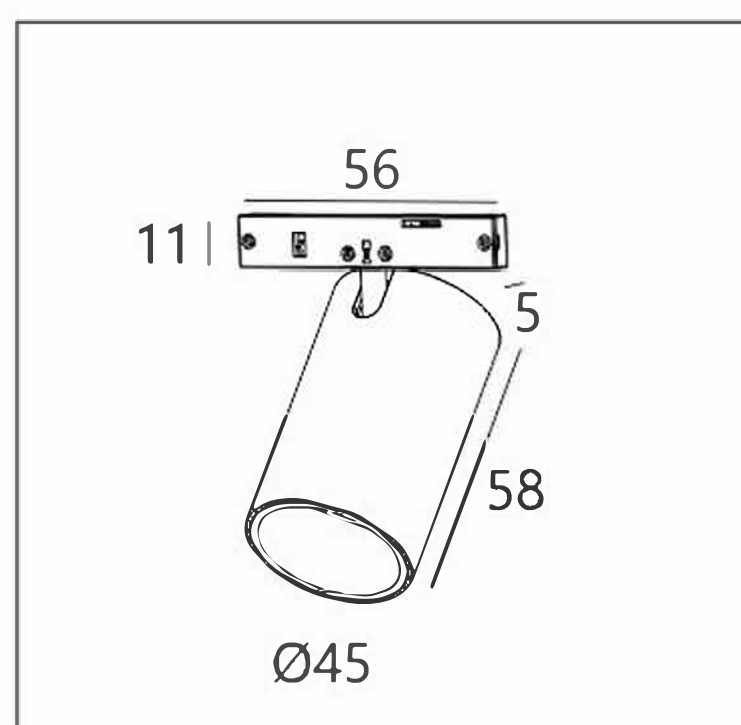

LightSource:
COB

Luminousflux:
700lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
9W

Outputvoltage:
36V

Outputcurrent:
200mA

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



BK





NELUX

VINYL K05 ONLY 5mm



KKA0560NR-A

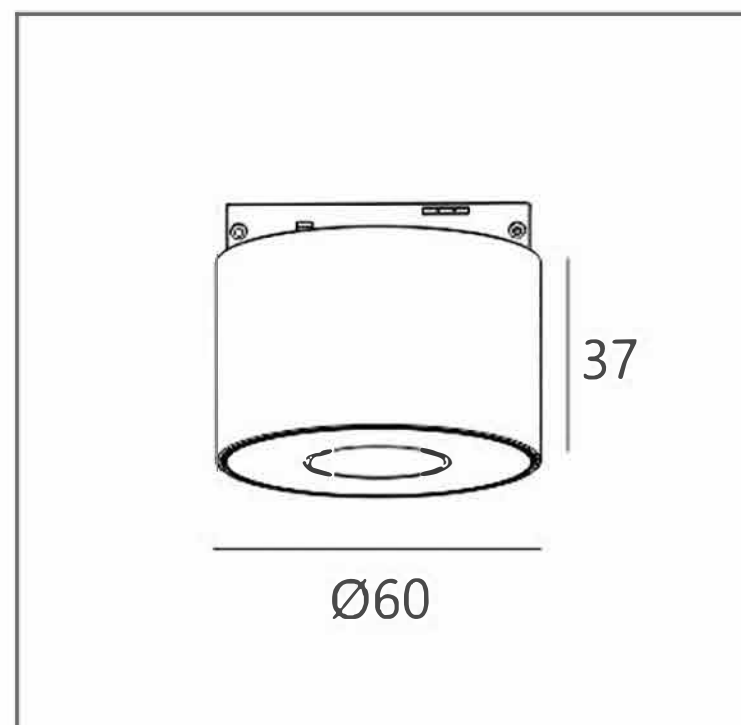

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KKA0560NR-B

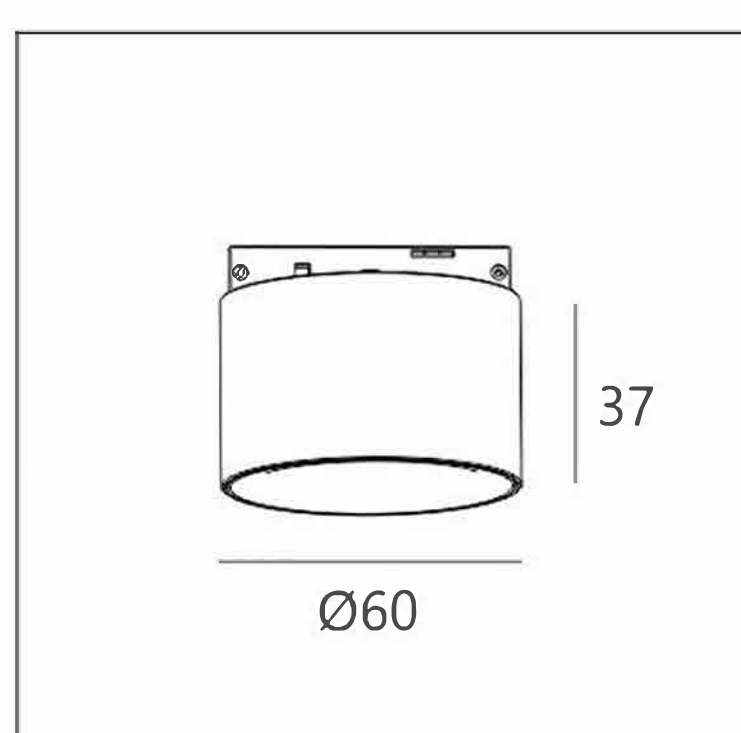

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KKA0560NR-C

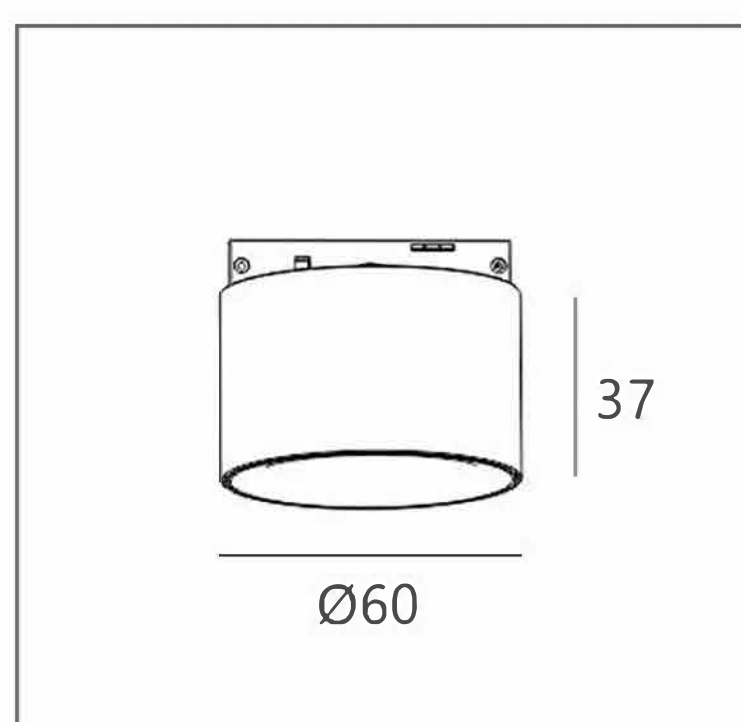

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/



COLORS



BK



KKB0513NR

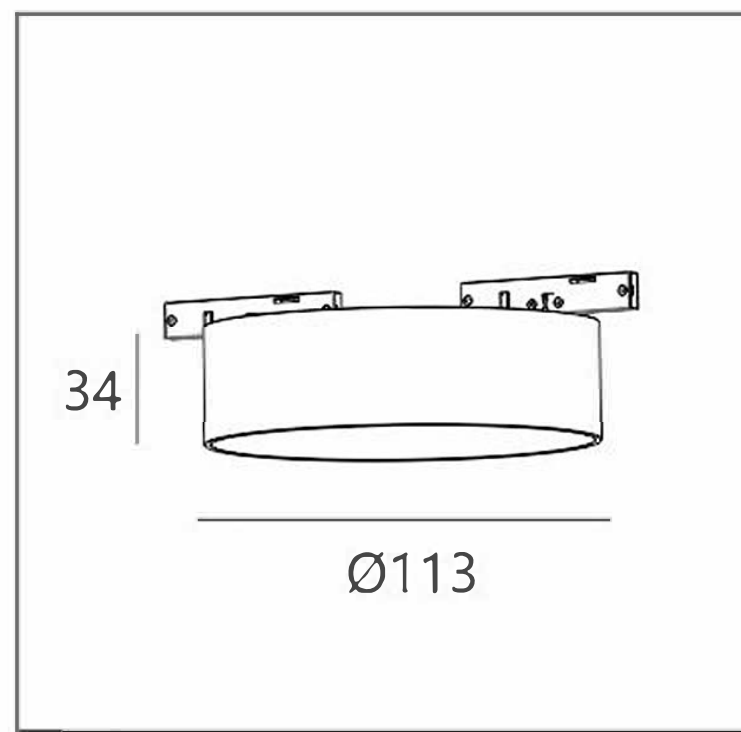

LightSource:
LED

Luminousflux:
700lm

CRI:
Ra > 80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
8W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KKB0514NR

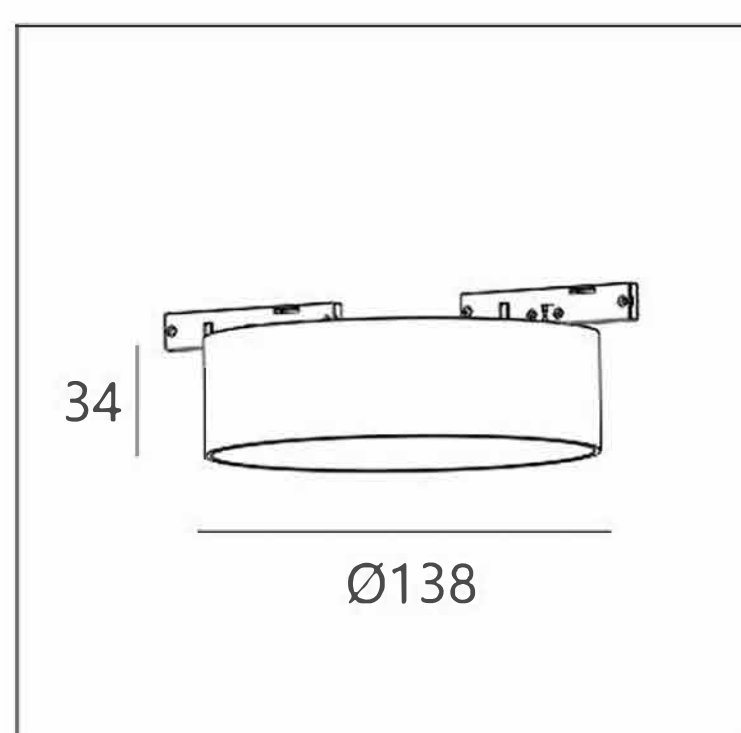

LightSource:
LED

Luminousflux:
1100lm

CRI:
Ra > 80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
12W

Outputvoltage:
36V

Outputcurrent:
/

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



BK





NELUX

MINI K05 ONLY 5mm



KLBO530NS

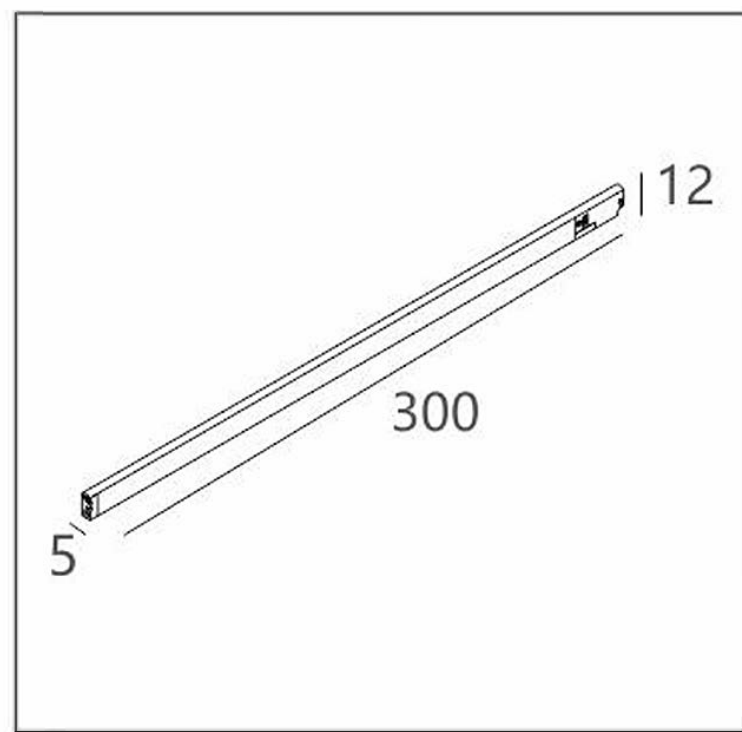

LightSource:
LED

Luminousflux:
450lm

CRI:
Ra > 80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLBO560NS

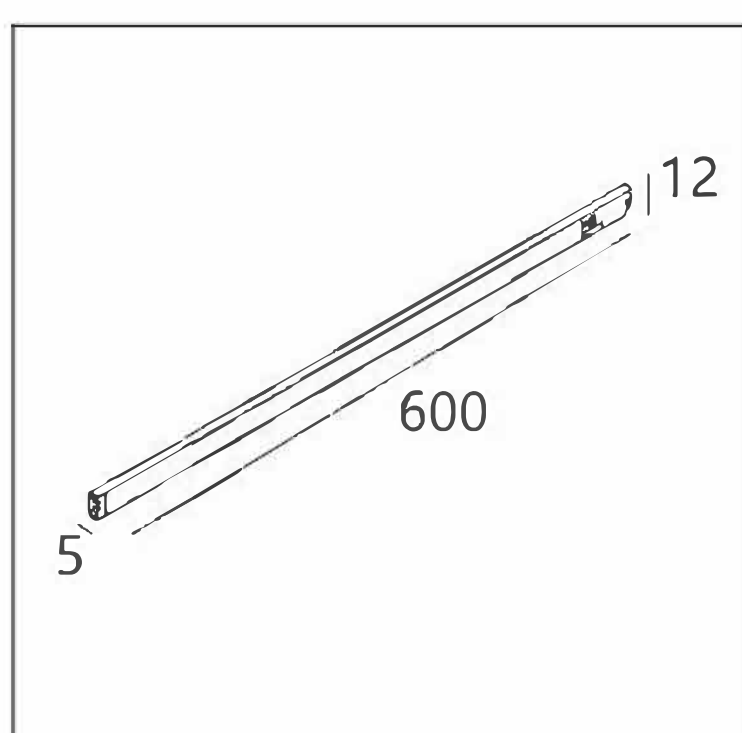

LightSource:
LED

Luminousflux:
900lm

CRI:
Ra > 80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
10W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLBO590NS

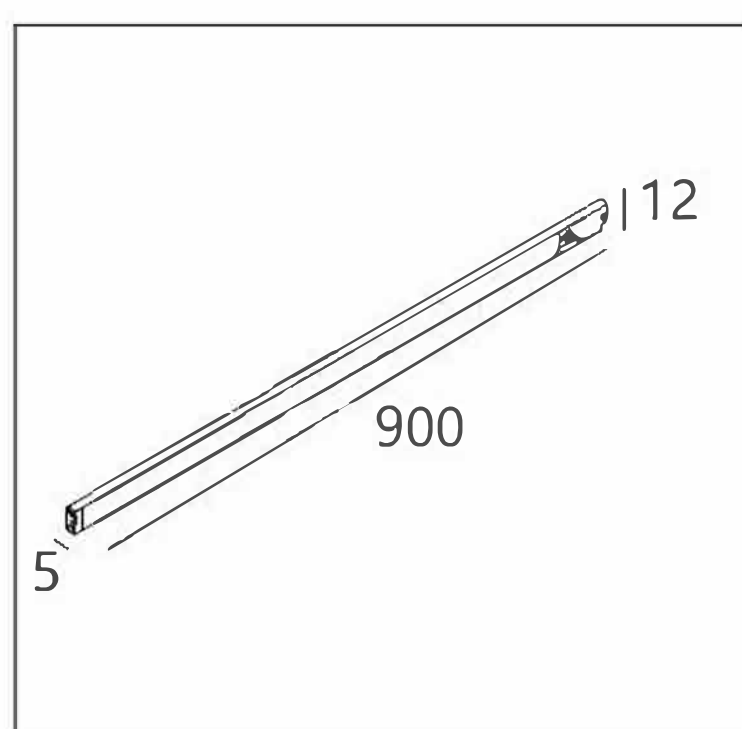

LightSource:
LED

Luminousflux:
1300lm

CRI:
Ra > 80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
15W

Outputvoltage:
36V

Outputcurrent:
/

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/



COLORS



BK





NELUX

MINI K05 ONLY 5mm



KLA1006NS

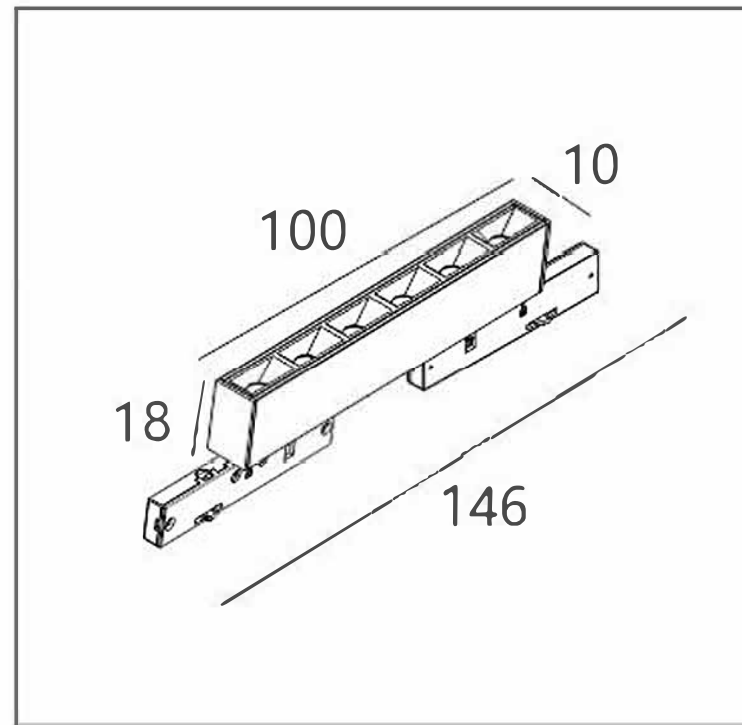

LightSource:
LED

Luminousflux:
500lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
6W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1012NS

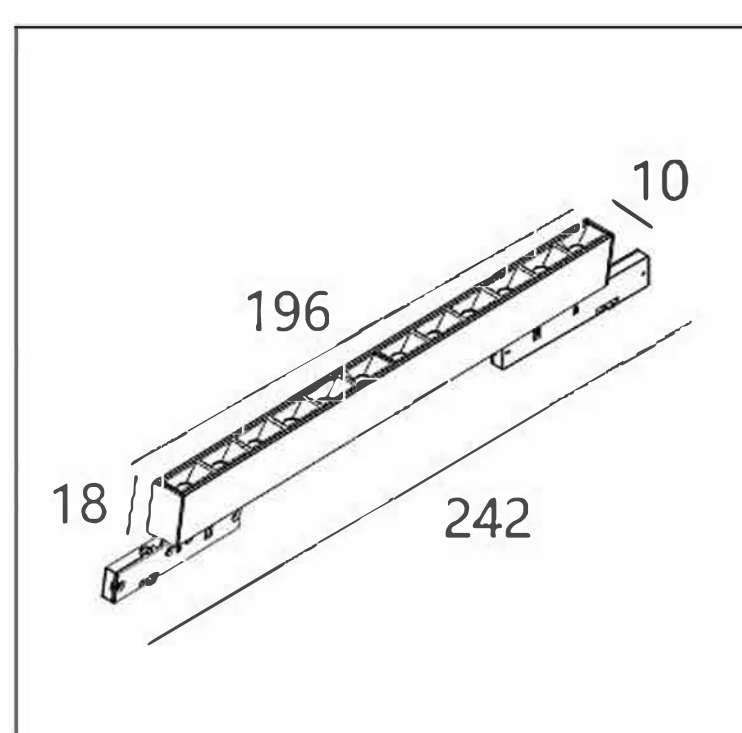

LightSource:
LED

Luminousflux:
1100lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
12W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1018NS

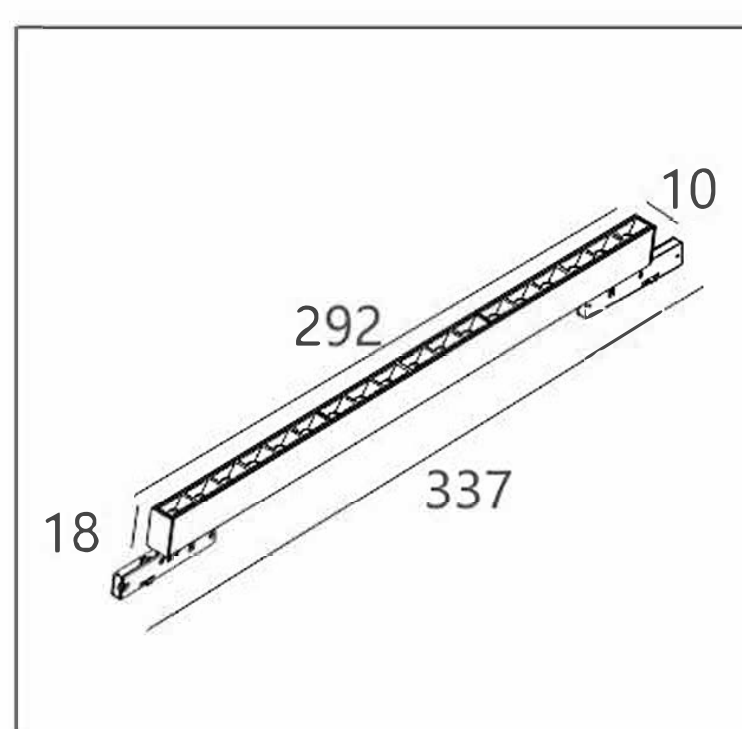

LightSource:
LED

Luminousflux:
1600lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
18W

Outputvoltage:
36V

Outputcurrent:
/



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1024NS

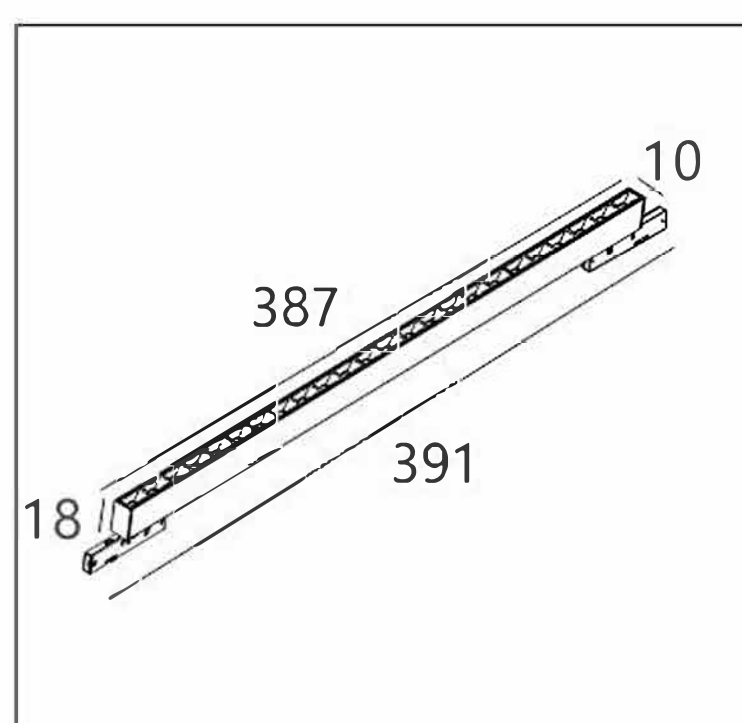

LightSource:
LED

Luminousflux:
2300lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
24W

Outputvoltage:
36V

Outputcurrent:
/

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/


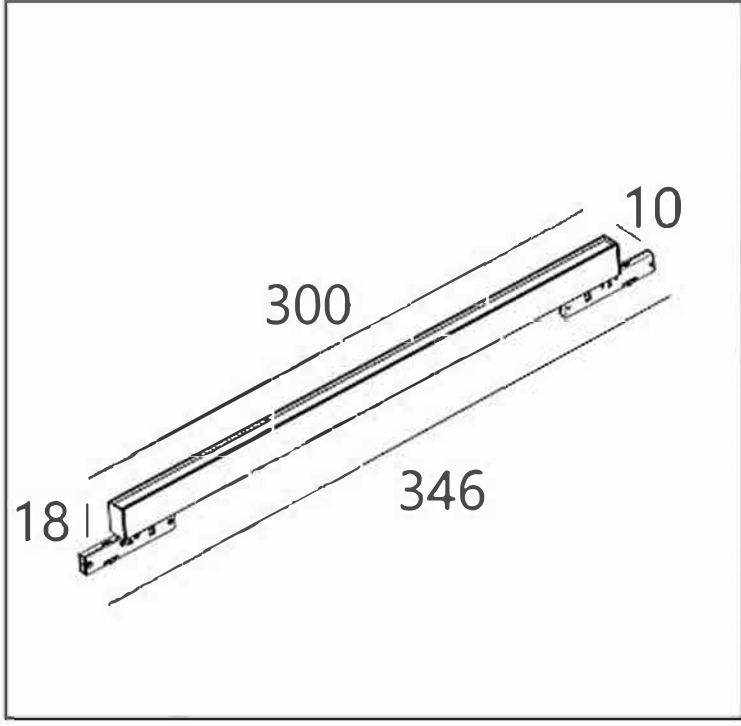

COLORS




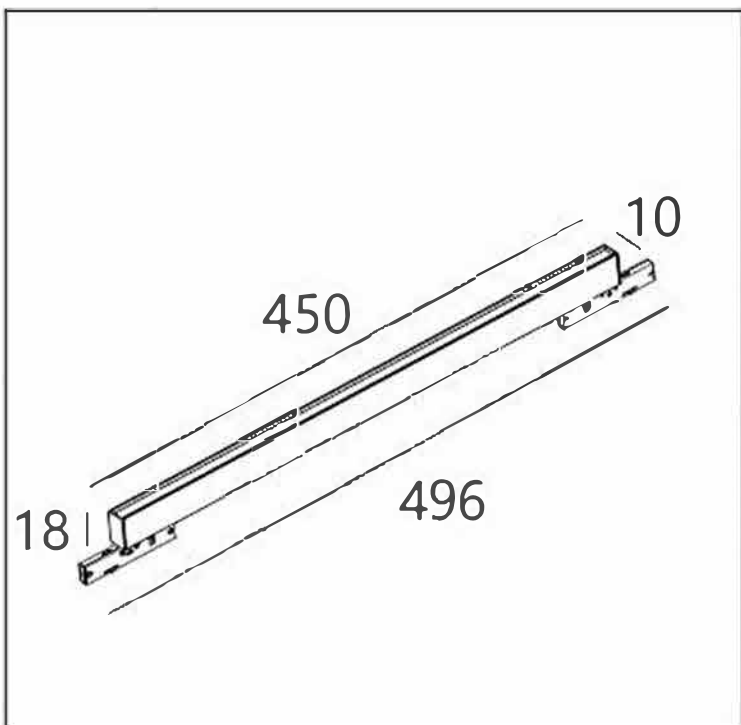

BK




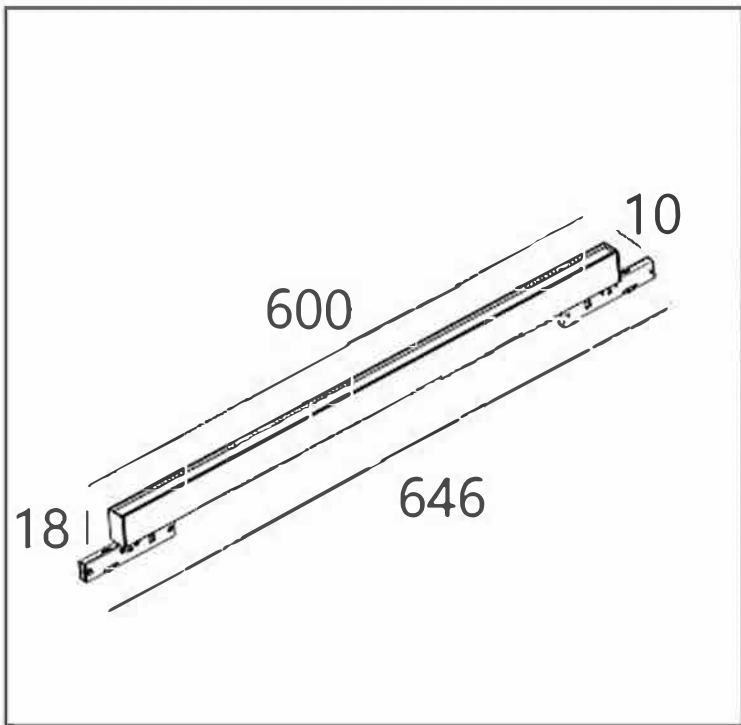

KLB1030NS

			LightSource: LED	Material: Aluminum	OPTIC: 100°
			Luminousflux: 700lm	Power: 8W	Mainsvoltage: DC24V
			CRI: Ra > 80	Outputvoltage: 36V	Description: Magneticsuction
			CCT: 2700K/3000K/4000K/5000K	Outputcurrent: /	Cutout: /


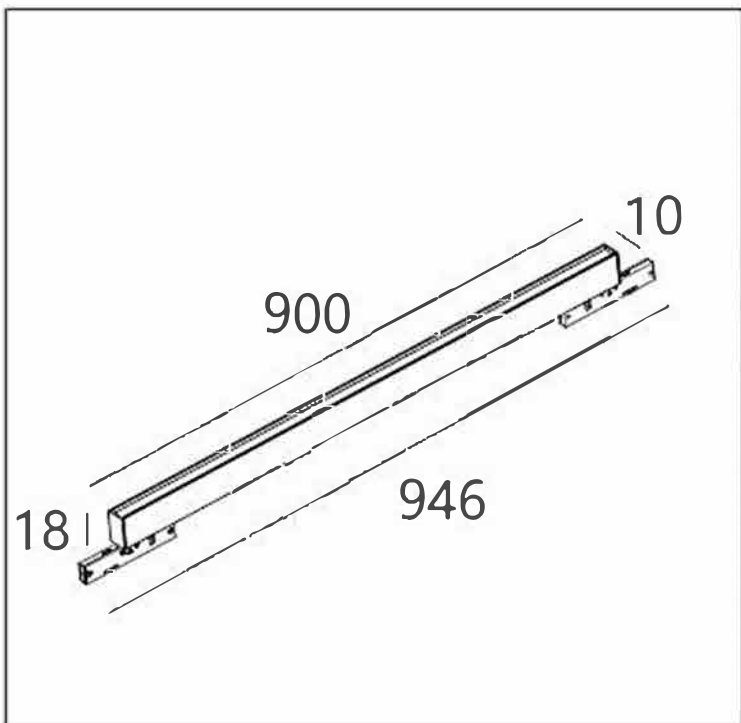

KLB1045NS

			LightSource: LED	Material: Aluminum	OPTIC: 100°
			Luminousflux: 1100lm	Power: 12W	Mainsvoltage: DC24V
			CRI: Ra > 80	Outputvoltage: 36V	Description: Magneticsuction
			CCT: 2700K/3000K/4000K/5000K	Outputcurrent: /	Cutout: /

KLB1060NS

			LightSource: LED	Material: Aluminum	OPTIC: 100°
			Luminousflux: 1300lm	Power: 16W	Mainsvoltage: DC24V
			CRI: Ra > 80	Outputvoltage: 36V	Description: Magneticsuction
			CCT: 2700K/3000K/4000K/5000K	Outputcurrent: /	Cutout: /

KLB1090NS

			LightSource: LED	Material: Aluminum	OPTIC: 100°
			Luminousflux: 2300lm	Power: 24W	Mainsvoltage: DC24V
			CRI: Ra > 80	Outputvoltage: 36V	Description: Magneticsuction
			CCT: 2700K/3000K/4000K/5000K	Outputcurrent: /	Cutout: /

COLORS





BK



103



KPA0540NR

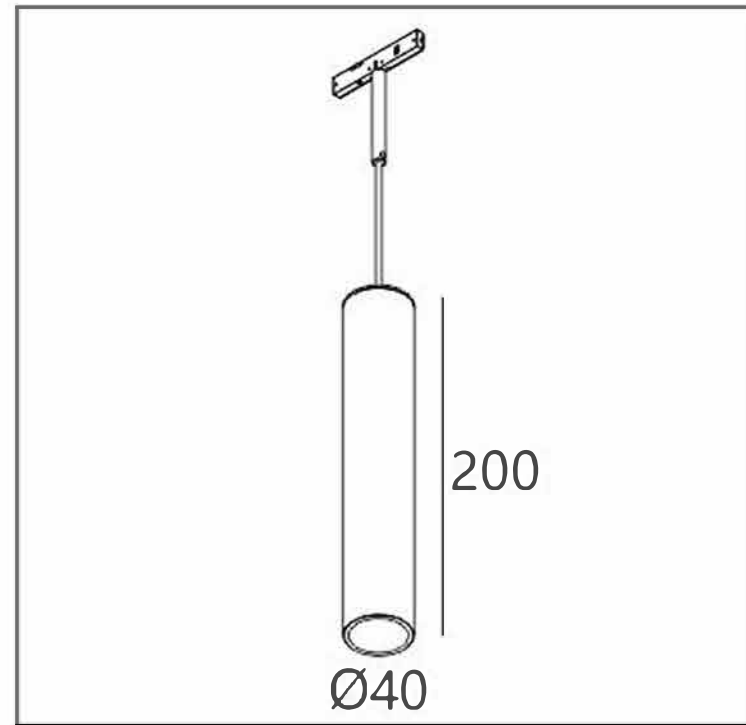

LightSource:
COB

Luminousflux:
500lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
7W

Outputvoltage:
36V

Outputcurrent:
150mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-A

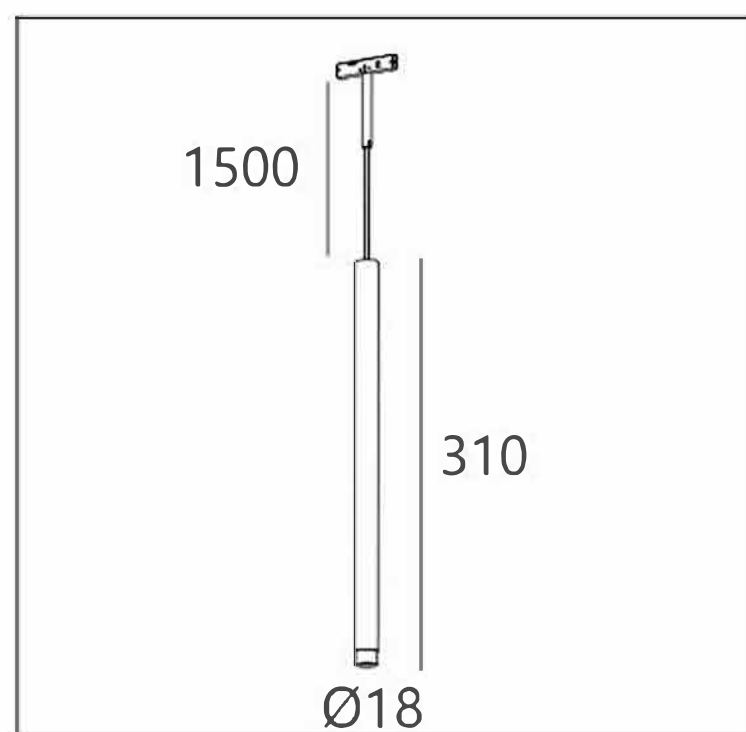

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-B

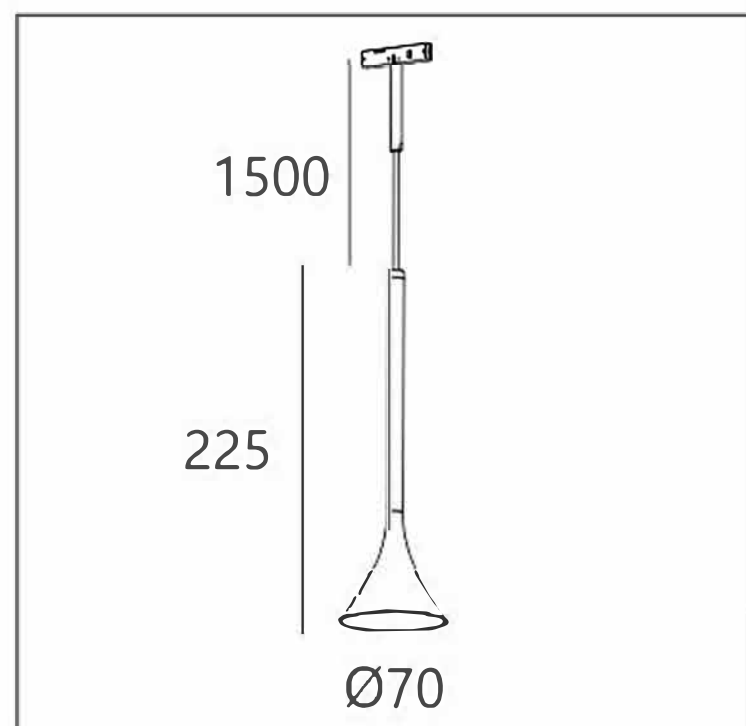

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA




OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-C

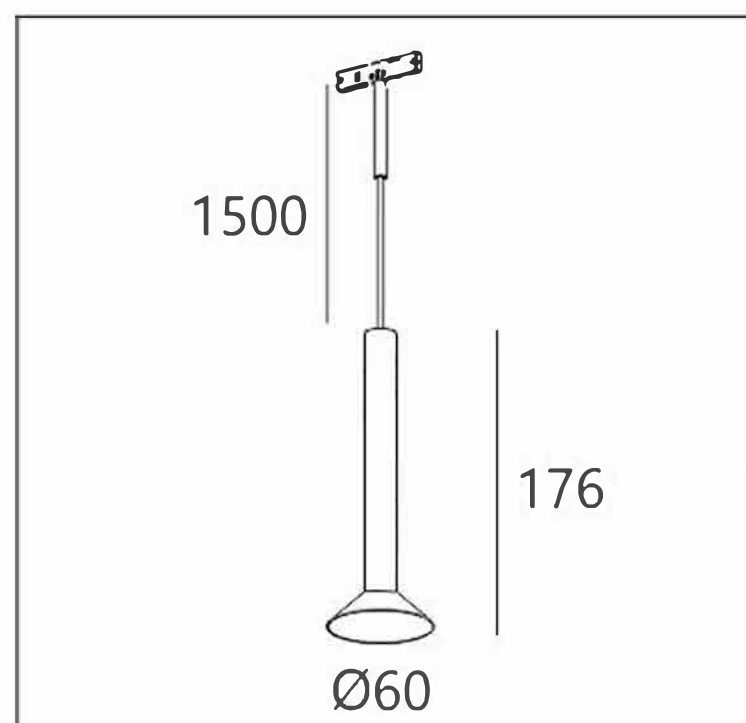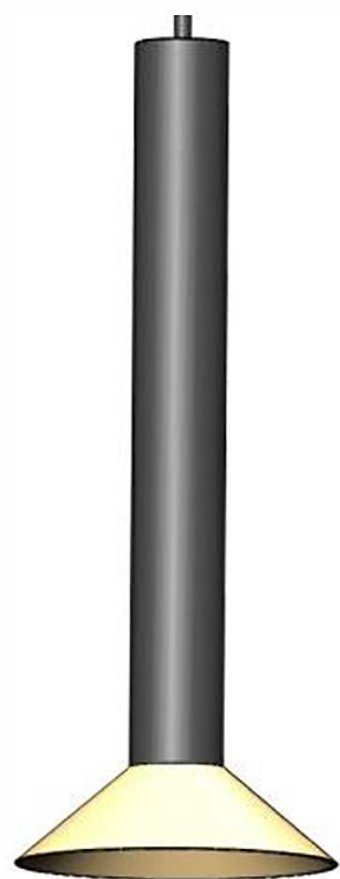

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA

OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/



COLORS



BK



KPA0518NR-D

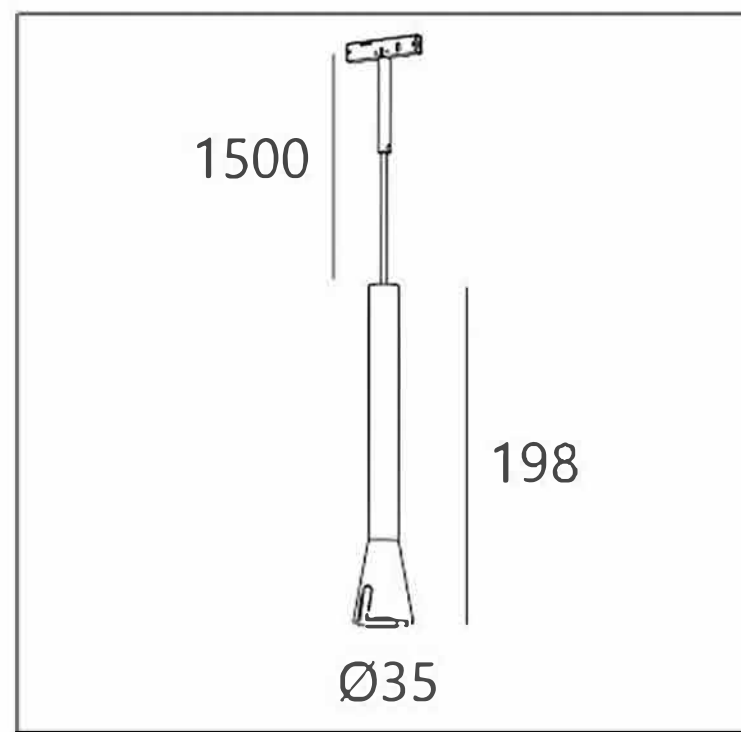

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB6560NR

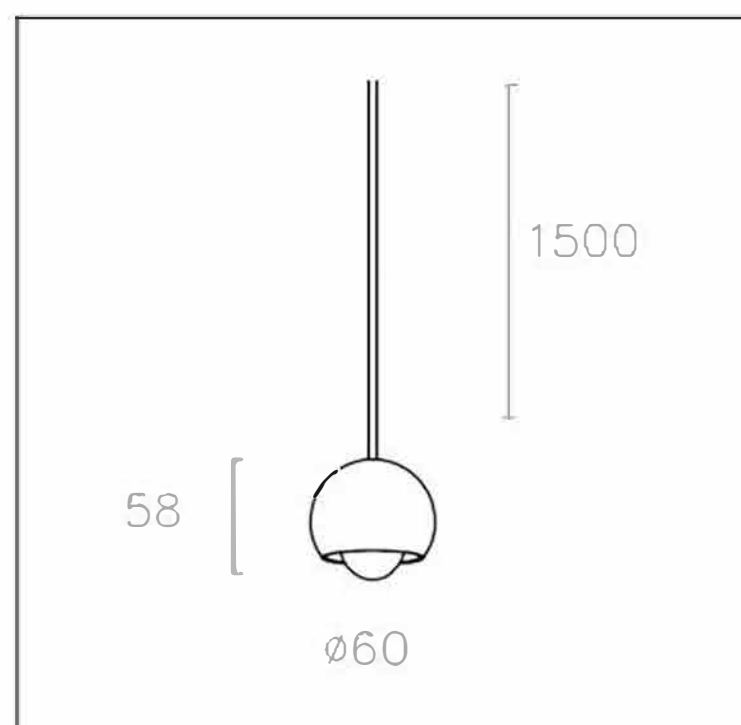

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA



OPTIC:
40°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB6208NR

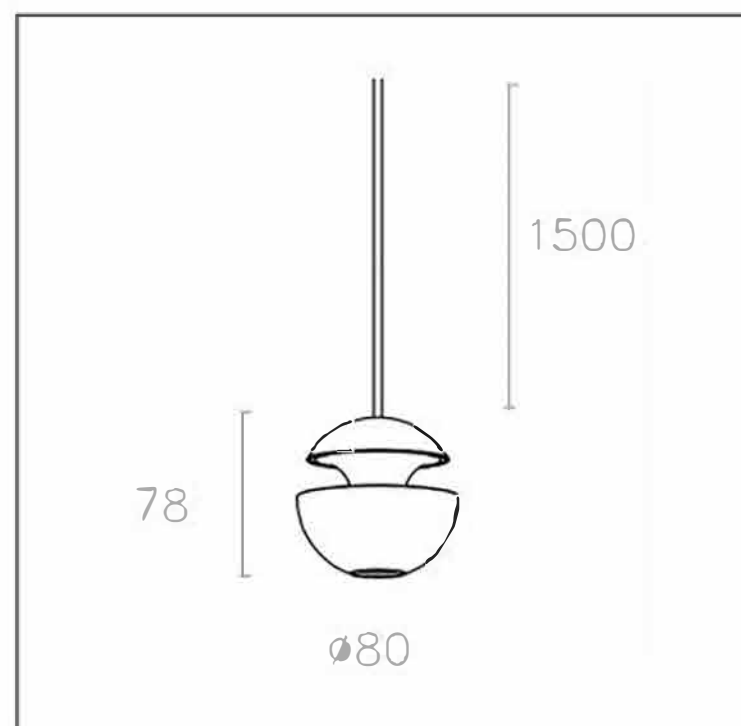

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
700mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB7080NR

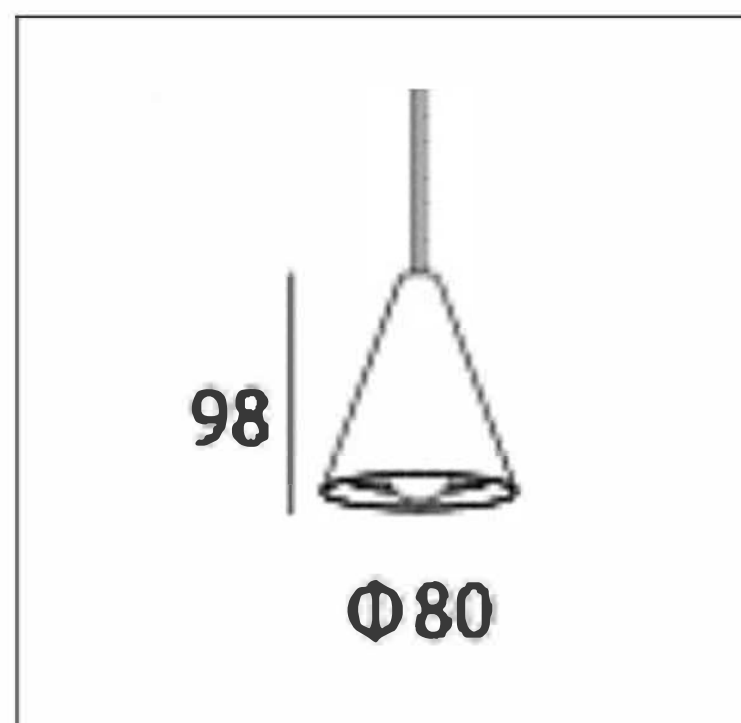

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
36V

Outputcurrent:
120mA

OPTIC:
40°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



BK

