

Our INLINE recessed are made from Aluminium Die-casting, electrostatic powder coating.  
 Reflectors made from PMMA different angles depending on the product design.  
 Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz



CR7059 5W,  
 CR90132 10W  
 CR135132 30W



CR12170 2\*5W  
 CR160132 2\*10W



CR5055 3W



CR8155 2\*3W



CR11255 3\*3W



CR14355 4\*3W



CR17856 5\*3W ADJ



CR33055 10\*3W



CR5656 3W ADJ



CR8456 2\*3W ADJ



CR11656 3\*3W ADJ



CR14756 4\*3W ADJ



CR17856 5\*3W ADJ



CR33456 10\*3W ADJ



CR4557 3W TRIM-LESS



CR6857 2\*3W TRIM-LESS



CR9957 3\*3W TRIM-LESS




CR13057 4\*3W TRIM-LESS




CR16257 5\*3W TRIM-LESS




CR31857 10\*3W TRIM-LESS



CR7059  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 5W  
Luminous flux ~480lm  
Light Source Cree  
CCT 2700K, 3000K, 4000K  
CRI >80, Optional CRI>90, CRI95, CRI97  
Beam Angle 20°, 25°, 40°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option





CR90132  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 10W  
Luminous flux ~850lm  
Light Source Cree  
CCT 2700K, 3000K, 4000K  
CRI >80, Optional CRI>90, CRI95, CRI97  
Beam Angle 20°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option



CR135132  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 30W  
Luminous flux ~2380lm  
Light Source Cree  
CCT 2700K, 3000K, 4000K  
CRI >80, Optional CRI>90, CRI95, CRI97  
Beam Angle 20°, 30°, 45°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option



CR12170  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 2\*5W  
Luminous flux ~780lm  
Light Source Cree  
CCT 2700K, 3000K, 4000K  
CRI >80, Optional CRI>90, CRI95, CRI97  
Beam Angle 20°, 25°, 40°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

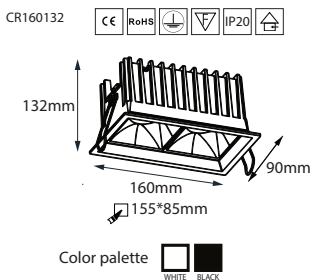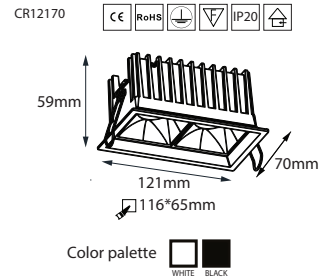


CR160132  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 2\*10W  
Luminous flux ~1720lm  
Light Source Cree  
CCT 2700K, 3000K, 4000K  
CRI >80, Optional CRI>90, CRI95, CRI97  
Beam Angle 20°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option





**CR5055**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 3W  
 Luminous flux ~140lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option


CR5055



43\*40mm

Color palette WHITE BLACK

CR8155



74\*40mm

Color palette WHITE BLACK


**CR8155**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 2\*3W  
 Luminous flux ~310lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option



**CR1255**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 3\*3W  
 Luminous flux ~520lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option




CR1255



109\*40mm

Color palette WHITE BLACK

CR14355




136\*40mm

Color palette WHITE BLACK

**CR14355**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 4\*3W  
 Luminous flux ~690lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option



CR17455



167\*40mm

Color palette WHITE BLACK

**CR17455**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 5\*3W  
 Luminous flux ~910lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option




CR33055

Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 10\*3W  
 Luminous flux ~1950lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option



CR33055




320\*40mm

Color palette WHITE BLACK

HONSHU SERIES



CR5656



47\*47mm



CR5656


Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 1\*3W  
 Luminous flux ~140lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option



CR8456

Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 2\*3W  
 Luminous flux ~310lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option

CR8456




78\*47mm




CR11656

Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 3\*3W  
 Luminous flux ~520lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option


CR11656




109\*47mm

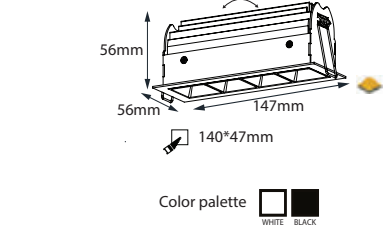

CR14756




140\*47mm

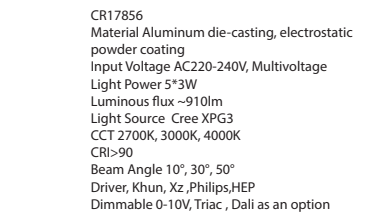

CR14756

Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 4\*3W  
 Luminous flux ~690lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option


CR17856



171\*47mm



CR33456



327\*47mm




Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 10\*3W  
 Luminous flux ~1950lm  
 Light Source Cree XPG3  
 CCT 2700K, 3000K, 4000K  
 CRI>90  
 Beam Angle 10°, 30°, 50°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option





CR4557




38\*46mm



CR4557  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 3W  
Luminous flux ~140lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

CR6857




69\*46mm



CR6857  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 2\*3W  
Luminous flux ~310lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

CR9957  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 3\*3W  
Luminous flux ~520lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

CR9957




100\*46mm



CR13057  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 4\*3W  
Luminous flux ~690lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option


CR13057



131\*46mm



CR16257




163\*46mm



CR16257  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 5\*3W  
Luminous flux ~910lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

CR31857  
Material Aluminum die-casting, electrostatic powder coating  
Input Voltage AC220-240V, Multivoltage  
Light Power 10\*3W  
Luminous flux ~1950lm  
Light Source Cree XPG3  
CCT 2700K, 3000K, 4000K  
CRI>90  
Beam Angle 10°, 30°, 50°  
Driver, Khun, Xz, Philips, HEP  
Dimmable 0-10V, Triac, Dali as an option

CR31857



319\*46mm



## HOSNHU TRIM-LESS SERIES

